

Please type a plus sign (+) inside this box → ☐

PTO/SB/29 (12-97)

Approved for use through 9/30/00. OMB 0651-0032

Patent and Trademark Office U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# CONTINUED PROSECUTION APPLICATION (CPA) REQUEST TRANSMITTAL

Submit an original, and a duplicate for fee processing.  
(Only for Continuation or Divisional applications under 37 CFR 1.53(b))

CHECK BOX, if applicable

☒ DUPLICATE

Address to:

Assistant Commissioner for Patents  
Box CPA  
Washington, DC 20231

Attorney Docket No.

A26996D2

First Named Inventor

Nepela

Express Mail Label No.

Total Pages

82

This is a request for a ☐ continuation or ☒ divisional application under 37 CFR 1.53(b),

(continued prosecution application (CPA)) of prior application number 08 / 702,977

filed on 08/26/96, entitled METHODS AND COMPOSITIONS FOR OPTIMIZING  
INTERFACIAL PROPERTIES OF MAGNETORESISTIVE SENSORS

## NOTES

**FILING QUALIFICATIONS:** The prior application identified above must be a nonprovisional application that is either: (1) complete as defined by 37 CFR 1.51(b) and filed on or after June 8, 1995, or (2) the national stage of an international application in compliance with 35 U.S.C. 371 and filed on or after June 8, 1995.

**C-I-P NOT PERMITTED:** A continuation-in-part application cannot be filed as a CPA under 37 CFR 1.53(d) but must be filed under 37 CFR 1.53(b).

**EXPRESS ABANDONMENT OF PRIOR APPLICATION:** The filing of this CPA is a request to expressly abandon the prior application as of the filing date of the request for a CPA. 37 CFR 1.53(b) must be used to file a continuation, divisional, or continuation-in-part of an application that is not to be abandoned.

**ACCESS TO PRIOR APPLICATION:** The filing of this CPA will be construed to include a waiver of confidentiality by the applicant under 35 U.S.C. 122 to the extent that any member of the public who is entitled under the provisions of 37 CFR 1.14 to access to, copies of, or information concerning, the prior application may be given similar access to, copies of, or similar information concerning, the other application or applications in the file jacket.

**35 U.S.C. 120 STATEMENT:** In a CPA, no reference to the prior application is needed in the first sentence of the specification and none should be submitted. If a sentence referencing the prior application is submitted, it will not be entered. A request for a CPA is the specific reference required by 35 U.S.C. 120 and to every application assigned the application number identified in such request, 37 CFR 1.78(a)

- ☐ Enter the unentered amendment previously filed on \_\_\_\_\_ under 37 CFR 1.116 in the prior nonprovisional application.
- ☒ A preliminary amendment is enclosed.
- This application is filed by fewer than all the inventors named in the prior application, 37 CFR 1.53(b)(4).
  - ☐ DELETE the following inventor(s) named in the prior nonprovisional application:  
\_\_\_\_\_
  - ☐ The inventor(s) to be deleted are set forth on a separate sheet attached hereto.
- ☐ A new power of attorney or authorization of agent (PTO/SB/81) is enclosed
- Information Disclosure Statement (IDS) is enclosed:
  - ☐ PTO-1449
  - ☐ Copies of IDS Citations

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box CPA, Washington, DC 20231.

Please type a plus sign (+) inside this box → ☐

PTO/SB/29 (12-97)  
Approved for use through 9/30/00 OMB 0651-0032  
Patent and Trademark Office U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

<b>CONTINUED PROSECUTION APPLICATION (CPA)</b> <b>REQUEST TRANSMITTAL</b> <i>Submit an original, and a duplicate for fee processing.</i> <i>(Only for Continuation or Divisional applications under 37 CFR 1.53(b))</i>	CHECK BOX, if applicable <input checked="" type="checkbox"/> <b>DUPLICATE</b>
--	--

<b>Address to:</b>  Assistant Commissioner for Patents Box CPA Washington, DC 20231	Attorney Docket No.	A26996D2
	First Named Inventor	Nepela
	Express Mail Label No.	AUG 07 1998
	Total Pages	82

This is a request for a ☐ continuation or ☒ divisional application under 37 CFR 1.53(b),  
(continued prosecution application (CPA)) of prior application number 08, 702, 977  
filed on 08/26/96, entitled METHODS AND COMPOSITIONS FOR OPTIMIZING

INTERFACIAL PROPERTIES OF MAGNETORESISTIVE SENSORS

**NOTES**

**FILING QUALIFICATIONS:** The prior application identified above must be a nonprovisional application that is either: (1) complete as defined by 37 CFR 1.51(b) and filed on or after June 8, 1995, or (2) the national stage of an international application in compliance with 35 U.S.C. 371 and filed on or after June 8, 1995.

**C-I-P NOT PERMITTED:** A continuation-in-part application cannot be filed as a CPA under 37 CFR 1.53(d), but must be filed under 37 CFR 1.53(b).

**EXPRESS ABANDONMENT OF PRIOR APPLICATION:** The filing of this CPA is a request to expressly abandon the prior application as of the filing date of the request for a CPA. 37 CFR 1.53(b) must be used to file a continuation, divisional, or continuation-in-part of an application that is not to be abandoned.

**ACCESS TO PRIOR APPLICATION:** The filing of this CPA will be construed to include a waiver of confidentiality by the applicant under 35 U.S.C. 122 to the extent that any member of the public who is entitled under the provisions of 37 CFR 1.14 to access to, copies of, or information concerning, the prior application may be given similar access to, copies of, or similar information concerning, the other application or applications in the file jacket.

**35 U.S.C. 120 STATEMENT:** In a CPA, no reference to the prior application is needed in the first sentence of the specification and none should be submitted. If a sentence referencing the prior application is submitted, it will not be entered. A request for a CPA is the specific reference required by 35 U.S.C. 120 and to every application assigned the application number identified in such request, 37 CFR 1.78(a)

- ☐ Enter the unentered amendment previously filed on \_\_\_\_\_ under 37 CFR 1.116 in the prior nonprovisional application.
- ☒ A preliminary amendment is enclosed.
- This application is filed by fewer than all the inventors named in the prior application, 37 CFR 1.53 (d)(4).
  - ☐ **DELETE** the following inventor(s) named in the prior nonprovisional application:  
\_\_\_\_\_  
\_\_\_\_\_
  - ☐ The inventor(s) to be deleted are set forth on a separate sheet attached hereto.
- ☐ A new power of attorney or authorization of agent (PTO/SB/81) is enclosed.
- Information Disclosure Statement (IDS) is enclosed:
  - ☐ PTO-1449
  - ☐ Copies of IDS Citations


[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box CPA, Washington, DC 20231.

A26996 D2

PTO/SB/92 (10-96)  
Approved for use through 10/31/99. OMB 0651-0031  
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.



### Certificate of Mailing under 37 CFR 1.8

I hereby certify that this correspondence is being deposited with the United States Postal Service with sufficient postage as first class mail in an envelope addressed to:

Assistant Commissioner for Patents  
Washington, D.C. 20231

on July 30, 1998  
Date

RECEIVED

AUG 07 1998

GROUP 2100

Nathan D. Kallman

Signature

NATHAN N. KALLMAN

Typed or printed name of person signing Certificate

RECEIVED

AUG 18 1998

GROUP 2100

Note: Each paper must have its own certificate of mailing.

RECEIVED

AUG 18 1998

GROUP 2100



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

RECEIVED

In the application of

Nepela

Serial No.

Filed:

Division of

Serial No. 08/702,977

Filed: 08/26/96

: Group Art Unit 2838 AUG 18 1998  
: Examiner R. Patel

GROUP 2100

: July 30, 1998  
: Attorney Docket A26996D2

METHODS AND COMPOSITIONS FOR OPTIMIZING INTERFACIAL PROPERTIES OF  
MAGNETORESISTIVE SENSORS

COMMISSIONER OF PATENTS AND TRADEMARKS  
Washington, D.C. 20231

RECEIVED

AUG 07 1998

PRELIMINARY AMENDMENT

GROUP 2100

Sir:

Please enter this preliminary amendment in the divisional application being submitted herewith. Enclosed are copies of the parent patent application, as filed, including the specification, claims, drawings and the Declaration signed by the inventor for filing as a CPA divisional application.

IN THE CLAIMS

Cancel Claims 1-6, 8, 9, 11, 13, 16-19, 21-23, 25-37, 40-46, 49, 51-55, 57-62, 65, 67-78, 80-81, 83-95 and 99-104 without prejudice.

Amend Claim 7, as follows:

7. [Amended] A method of making a magnetoresistive sensor formed with an electrically conductive spacer interposed between a first and a second ferromagnetic layer, comprising the steps of:

selecting a first material having a first electronegativity for said first ferromagnetic layer;

selecting a second material having a second electronegativity for said electrically conductive spacer; and  
selecting a third material having a third electronegativity for said second ferromagnetic layer;  
wherein an absolute value of a difference between said first and second electronegativities is minimized, wherein said first material and said second material comprise substantially the same crystal structure, wherein said first material comprises a first face centered cubic material and said second material comprises a second face centered cubic material.

20. [Amended] A method of making a magnetoresistive sensor formed with an electrically conductive spacer interposed between a first and a second ferromagnetic layer, comprising the steps of:

selecting a first material having a first electronegativity for said first ferromagnetic layer;

selecting a second material having a second electronegativity for said electrically conductive spacer; and

selecting a third material having a third electronegativity for said second ferromagnetic layer;

wherein an absolute value of a difference between said first and second electronegativities is minimized, wherein said step of selecting said first material includes the step of selecting a first Heusler alloy, wherein said first Heusler alloy has a composition of  $M_1MnM_2$ , where  $M_1$  is an element selected from the

group consisting of Al, Ga, Ge, As, In, Si, Sn and Bi, and M<sub>2</sub> is an element selected from the group consisting of Co, Ni, Cu, Ir, Pd, Pt and Au.

Claim 24, line 1, change "22" to --20--.

38. [Amended] A magnetoresistive sensor comprising:

first and second ferromagnetic layers, said first ferromagnetic layer comprising a first material having a first electronegativity; and

an electrically conducting spacer interposed between said ferromagnetic layers, and comprising a second material having a second electronegativity;

wherein an absolute value of a difference between said first and second electronegativities is minimized, wherein said second ferromagnetic comprises a third material having a third electronegativity and said first and third electronegativities are approximately equal, wherein said first material and said second material comprise substantially the same crystal structure, wherein said first material comprises a first body centered cubic material and said second material comprises a second body centered cubic material.

Claim 39, line 1, change "36" to --38--.

Claim 47, line 1, change "46" to --38--.

Claim 48, line 1, change "27" to --38--.

50. [Amended] A magnetoresistive sensor as in Claim 38, wherein said first material is a first Heusler alloy, wherein said first Heusler alloy has a composition of  $M_1MnM_2$ , where  $M_1$  is an element selected from the group consisting of Al, Ga, Ge, As, In, Si, Sn and Bi, and  $M_2$  is an element selected from the group consisting of Co, Ni, Cu, Ir, Pd, Pt and Au.

Amend Claim 56 as follows:

56. [Amended] A method of optimizing the interfacial properties of a magnetoresistive sensor comprising the steps of:

selecting first and second ferromagnetic layers, each having similar crystallographic orientations, said first ferromagnetic layer having a first electronegativity; and

selecting an electrically conductive spacer disposed between said ferromagnetic layers and having a crystallographic orientation similar to said ferromagnetic crystallographic orientations and having a second electronegativity so that an absolute value of a difference between said first and second electronegativities is minimized, wherein said absolute value is less than approximately 0.14 eV.

Amend Claim 66 as follows:

66. [Amended] A magnetoresistive sensor disposed on a substrate comprising:

first and second ferromagnetic layers, each having similar crystallographic orientations, said first ferromagnetic

layer having a first electronegativity; and

an electrically conductive spacer interposed between said ferromagnetic layers and having a crystallographic orientation similar to said ferromagnetic crystallographic orientations and having a second electronegativity so that an absolute value of a difference between said first and second electronegativities is minimized, wherein said ferromagnetic layers comprise single crystal structures and said electrically conductive spacer comprises a single crystal.

Amend Claim 79 as follows:

79. [Amended] A magnetoresistive sensor as in Claim 38,

including a substrate in atomic contact with a side of one of said ferromagnetic layers opposite said spacer; and

an antiferromagnetic layer in atomic contact with a side of another one of said ferromagnetic layers opposite said spacer;

wherein the sensor is a spin valve sensor;

a buffer layer interposed between said first ferromagnetic layer and said substrate, wherein said buffer layer is an element selected from a group consisting of Ta, Cr, Fe, Pt, Pd, Ir and Au.

Amend Claim 82 as follows;

82. [Amended] A magnetoresistive sensor as in Claim 79, wherein said first ferromagnetic layer means is formed over said substrate;



wherein the sensor is a giant magnetoresistive sensor;  
said first and second ferromagnetic layers comprise a  
plurality of said first and second ferromagnetic layers;  
said electrically conductive spacer comprises a plurality of  
said spacers;  
a buffer layer interposed between one of said ferromagnetic  
layers and said substrate;

wherein said buffer layer is an element selected from a group consisting of Ta, Cr, Fe, Pt, Pd, Ir and Au.


#### REMARKS

As amended, Claims 7, 10, 12, 14, 15, 20, 24, 38, 39, 47, 48, 50, 56, 63, 64, 66, 79, 82, and 96-98 are now in the case. The remaining claims which have been allowed in the parent application and in the prior divisional application have been canceled from this second divisional application. A favorable action on the claims now in this case is respectfully requested.

An application transmittal form and the filing fee of \$1140 for this second divisional CPA case are also enclosed.

By separate correspondence, the issue fee will be paid for the allowed claims of the first filed divisional CPA application.

Respectfully submitted,



Nathan N. Kallman

NNK:el  
encls.

RECEIVED

AUG 18 1998

GROUP 2100

METHODS AND COMPOSITIONS FOR OPTIMIZING INTERFACIAL  
PROPERTIES OF MAGNETORESISTIVE SENSORS

Field of the Invention

This invention relates to methods and compositions for optimizing the interfacial properties of magnetoresistive sensors, and specifically data storage devices such as spin valve sensors and giant magnetoresistive (GMR) sensors.

Description of the Prior Art

Significant progress has occurred over the past two decades in the design of multilayered nanostructured thin film systems. Large GMR current-in-plane (CIP) effects have been described in a Fe/Cr multilayered system, approximating a magnetoresistance effect ( $\Delta R/R$ ) of 100 percent, which is a change by a factor of two in resistance with an adequate external field. Since then, many other multilayer GMR and spin valve sensors have been explored. To date, the highest GMR effect is in the Fe/Cr system and is approximately 150 percent at a measurement temperature of 5°K, and remains the largest value observed at any temperature to date. Both the GMR and spin valve effects are characterized by  $\Delta R/R$ , which is defined as the change in resistance divided by the initial resistance, and is  $(R_0 - R_H)/R_0$ , where  $R_0$  is the sensor resistance without an external magnetic field and a  $R_H$  is the resistance at a minimum external field required to maximize  $\Delta R/R$ .

Numerous theoretical studies have attempted to explain the behavior of spin valve and GMR effects. However, there does not currently exist an explanation of the main factors controlling

1 the magnitude of the sensor response, as characterized by  $\Delta R/R$ ,  
2 as it relates to the required properties of the conductive  
3 spacers and ferromagnetic (FM) layers constituting such device.  
4 Experimental efforts have been largely based on trial and error,  
5 by investigating with various combinations of FM layers and  
6 conductive spacer layers. None of the previous work has yielded  
7 quantitative guidelines for the maximization of  $\Delta R/R$  for spin  
8 valve or GMR sensors by providing selection criteria for the  
9 layer compositions of the FM material and the conductive spacer.

10  
11 Summary of the Invention

12 An object of this invention is to provide means and methods for  
13 optimizing the manufacturing process of various magnetoresistive  
14 devices, including but not limited to thin film devices such as  
15 sensors used in data storage devices.

16  
17 Another object of this invention is to provide guidelines for  
18 optimizing the selection of multilayer compositions by matching  
19 or minimizing the difference in the electronegativities ( $\chi$ ) of  
20 adjacent ferromagnetic layers and conductive spacers.

21  
22 Still another object of the present invention is to maximize the  
23 signal output, as represented by  $\Delta R/R$  of spin valve sensors and  
24 GMR sensors.

25  
26 A further object of this invention is to maximize the thermal  
27 stability of spin valve sensors and GMR sensors.

28  
29 Yet another object of this invention is to maximize the corrosion  
30 resistance of spin valve sensors and GMR sensors.

1  
2 Another object of the invention is to provide conductive spacers  
3 which minimize electromigration in the FM and spacer layers,  
4 which extend the useful lifetimes of spin valve and GMR sensors.  
5

6 Another object is to provide for multiple interfacial matching of  
7 an FM layer with its contacting conductive spacers.

8 In accordance with this invention, spin valve sensors and GMR  
9 sensors are made with layers of FM material and conductive  
10 spacers interposed between the FM layers. The difference in  
11 electronegativities between the layers and spacers is minimized.

12 A relatively low resistivity and/or a large mean free path is  
13 provided by the conductive spacer material. As a result of these  
14 conditions, the  $\Delta R/R$  of the sensor is maximized. The novel  
15 sensor is also corrosion resistant, exhibits greater chemical and  
16 thermal stability, and signal output of the sensor device is  
17 increased.  
18

19 A method for optimizing the interfacial properties of a  
20 magnetoresistive sensor, such as a GMR or spin valve, is  
21 disclosed. The method includes selecting one or more FM layers  
22 having at least a first electronegativity, and selecting one or  
23 more conductive spacers having at least a second  
24 electronegativity, such that the selecting steps include the step  
25 of substantially matching or minimizing the difference between  
26 the first and second electronegativities and thereby minimizing  
27 the difference between the electronegativities of the selected  
28 spacers and FM layers.  
29

30 Brief Description of the Drawing

1 The invention will be described in greater detail with reference  
2 to the drawings in which:

3  
4 Fig. 1 is a cross-sectional view depicting a spin valve sensor  
5 made in accordance with this invention;

6  
7 Fig. 2 is a cross-sectional view depicting a GMR sensor made in  
8 accordance with this invention;

9  
10 Fig. 3 is a graph plotting a relationship between a square root  
11 of the absolute value of an electronegativity difference (i.e.,  
12  $|\Delta\chi|^{1/2}$ ) versus  $\Delta R/R$  for spin valve sensors with various  
13 ferromagnetic/conductive spacer interfaces;

14  
15 Fig 4 illustrates three curves plotting the relationship between  
16  $|\Delta\chi|^{1/2}$  versus  $\Delta R/R$  for various spin valve sensors at different  
17 temperatures;

18  
19 Fig. 5 illustrates three curves plotting the relationship between  
20  $|\Delta\chi|^{1/2}$  versus  $\Delta R/R$  for various GMR sensors illustrating the  
21 first, second and third peaks of GMR response;

22  
23 Fig. 6 illustrates a curve plotting the relationship between  
24  $|\Delta\chi|^{1/2}$  versus  $\Delta R/R$  for various GMR sensors having various crystal  
25 structures.

26  
27 Fig. 7 is a chart that illustrates various exemplary combinations  
28 and compositions of FM layers and spacers for use in spin valve  
29 and GMR sensors;

1 Fig. 8 illustrates two curves plotting the electrical resistivity  
2 in microohm-cm versus the atomic composition for a Cu-Au alloy  
3 system;

4  
5 Fig. 9 illustrates two graphs plotting the electrical resistivity  
6 in microohm-cm versus the atomic composition for a CuPt alloy  
7 system;

8  
9 Fig. 10 illustrates a use of random crystal orientation in a spin  
10 valve sensor made according to the present invention;

11  
12 Fig. 11 illustrates a use of preferred crystal orientation in a  
13 spin valve sensor made according to the present invention;

14  
15 Fig. 12 is a cross-sectional view of a spin valve sensor with  
16 compound interfaces made according to the present invention; and

17  
18 Fig. 13 is a cross-sectional view of a giant magnetoresistive  
19 sensor with compound interfaces made according to the present  
20 invention.

21  
22 Similar numerals refer to similar elements in the drawings. It  
23 should be understood that the sizes of the different components  
24 in the figures are not necessarily in exact proportion, and are  
25 shown for visual clarity and for the purpose of explanation.

26  
27 Detailed Description of the Invention

28 Fig. 1 is a partial cross-section representing a spin valve  
29 magnetoresistive (MR) sensor 10 made according to the present  
30 invention. The spin valve sensor 10 is formed of two FM layers

(i.e., FM1 and FM2), that are separated by a conductive spacer or layer 12. The sensor 10 is formed on a nonmagnetic substrate on which a buffer layer, about 25-100 Angstroms ( $\text{\AA}$ ) thick, is deposited. The buffer layer is made from Ta, Cr, Fe, Pt, Pd, Ir or Au. The FM layers FM1 and FM2 may have the same or different composition. If the difference in coercivity between FM1 and FM2 is sufficient (e.g., approximately 50 to 100 Oersteds), a magnetoresistance effect will be observed when an external field changes from positive to negative and a magnetic configuration of one of the layers changes while the other remains stationary. Alternatively, (as shown in Fig.1), the magnetization of one of the FM layers, (e.g., FM2), may be pinned by placing it in atomic contact with an antiferromagnetic (AFM) layer 14, such as an FeMn layer. The magnetization of the unpinned FM layer FM1 is free to rotate in the presence of an external magnetic field.

The application of an external magnetic field causes a variation in the magnetization orientation of the FM layer FM1, which causes a change in the spin-dependent scattering of conduction electrons and thus in the electrical resistance of the spin valve sensor 10. The resistance of the spin valve sensor 10 changes as the relative alignment of the magnetization of the FM1 layer changes. The FM2 layer remains constrained and its magnetization direction remains the same.

The present invention includes an empirical relationship between  $\Delta R/R$  and the electronegativity difference between adjacent FM layers and conductive spacer layers in spin valve and GMR sensors. This relationship applies to both spin valve and GMR sensors, and shows that  $\Delta R/R$  response is a function of the

1 electronegativity mismatch between adjacent FM layers and  
2 conductive spacers. It is believed that the mismatch in  
3 electronegativities results in a potential barrier at the  
4 interface that is related to the absolute value of the difference  
5 in the electronegativities of the FM layers and the conductive  
6 spacers, i.e.,  $|\Delta\chi|$ . With increasing  $\Delta\chi$  mismatch, the  $\Delta R/R$   
7 amplitude of the spin valve and GMR sensors will decrease to a  
8 point where  $\Delta R/R$  will approach an intercept value of zero. As  
9 shown later, this intercept value uniformly occurs at a value of  
10  $|\Delta\chi|^{1/2}$  approximately equal to 0.5 for both spin valve and GMR  
11 sensors indicating that the underlying mechanism for obtaining  
12  $\Delta R/R$  is the same for both types of sensors.

13  
14 Thus, according to a preferred embodiment, the spin valve sensor  
15 10 (Fig. 1) is formed by selecting the desired spacer material.  
16 Subsequently, the FM layers FM1 and FM2 are selected such that  
17 their average electronegativities match or substantially  
18 approximate the average electronegativity of the selected spacer  
19 12.

20  
21 Another condition of the empirical relation relates to the  
22 crystal structures of the FM and spacer layers. The FM and  
23 spacer layers preferably should have the same or similar crystal  
24 structure, e.g., a face-centered cubic ("FCC") FM layer adjacent  
25 to an FCC conductive spacer layer or a body-centered cubic  
26 ("BCC") FM layer adjacent to a BCC spacer layer. These  
27 combinations are referred to herein as "FCC Systems" and "BCC  
28 Systems", respectively.  
29



1 The lowest  $|\Delta\chi|$  reported in an FCC System is in the range of  
2 approximately .12 eV. For example, a GMR device comprising  
3 70Co:30Fe FM layers and Ag spacers exhibited a  $\Delta R/R$  of  
4 approximately 100 with a  $|\Delta\chi|$  of approximately .12 eV. The  
5 lowest  $|\Delta\chi|$  reported in a BCC System is in the range of  
6 approximately .07 eV. For example, in the GMR device described  
7 previously (i.e., Fe/Cr) having a  $\Delta R/R$  of approximately 150, had  
8 a  $|\Delta\chi|$  of approximately .07 eV. Magnetoresistive sensors  
9 according to the invention can achieve lower  $|\Delta\chi|$  values and,  
10 consequently, higher  $\Delta R/R$  sensor outputs than previously  
11 reported values.

12  
13 Fig. 2 illustrates the use of the present inventive concept in a  
14 GMR sensor 20. The GMR sensor 20 is a sandwich structure formed  
15 of a plurality of layers, such as FM materials, that are  
16 separated by a plurality of conductive spacers 22. Although not  
17 shown in Fig. 2, the FM/spacer structure can have a multiplicity  
18 of repeat units of FM/spacer. In the GMR sensor 20 the  
19 electronegativities of each of the successive layers FM are  
20 substantially matched or their difference in  $\chi$  is minimized with  
21 respect to the electronegativity of the contiguous spacers 22.

22  
23 Fig. 3 illustates that the linear relationship of the invention  
24 is generally maintained irrespective of the composition of the FM  
25 and spacer materials. Further, Fig. 4 illustrates that the  
26 linear relationship is maintained over a wide range of  
27 measurement temperatures. Fig. 5 illustrates that linear  
28 relationship holds for a variety of FM alloy compositions for a  
29 fixed spacer element. Further, Fig. 6 illustrates that the  
30 linear relationship holds for both FCC Systems and BCC Systems.

The percent ionic content of an interface A/B between an FM layer A and a conductive spacer B can be estimated by the electronegativity difference between the FM A and the spacer B as shown in the following equation (Pauling, "The Nature of the Chemical Bond", 98 (1960, 3d)):

$$\text{Percent Ionic Content} = (1 - e^{(\chi_A - \chi_B)^2/4}) \times 100$$

By applying the foregoing empirical finding that  $|\Delta\chi|^{1/2} \cong 0.5$  when  $\Delta R/R$  approaches zero, it is possible to estimate the percent ionic content of the interface A-B. Specifically, when  $|\chi_A - \chi_B|^{1/2} = |\Delta\chi|^{1/2} = 0.5$ , the ionic content at the interface A-B is approximately 1.5 percent.

Additionally, at the intercept point where  $\Delta R/R$  approaches zero, the excess ionic energy at the FM/spacer interface can be estimated to be 1.96 Kcal or 0.085 eV (Pauling, Table 3-6 at page 90). This energy term relates to the electron transmission at the interface, which influences  $\Delta R/R$ . Thus, at  $|\Delta\chi|^{1/2}$  equal to 0.5 electron volts, the probability of electron transmission through a potential barrier at the interface is approximately 0 percent.

By an appropriate selective matching of the electronegativities of the spacer 12 (Fig. 1) and the adjacent FM layers FM1 and FM2, it is possible to maximize the magnetoresistive response (as characterized by  $\Delta R/R$ ), and thus the signal output of the spin valve sensor 10 is maximized.

It is also preferable that the bulk resistivities of the materials used in the FM layers and conductive spacers be relatively low to ensure a high  $\Delta R/R$  sensor output. For example, in both GMR and spin valve sensors it is desirable that the bulk resistivities of the FM layer material be less than 100 microhm ( $\mu\Omega$ ) cm, and the spacer material be less than 30  $\mu\Omega$ -cm.

Another aspect of the invention is the relationship illustrated by the following equations:

$$(1a) \quad |\Delta\chi| = \chi(\text{FM}) - \chi(\text{spacer}),$$

$$(1b) \quad \text{where: } \chi(\text{spacer}) = 0.44 \phi(\text{spacer}) - 0.15, \text{ and}$$

$$(1c) \quad \chi(\text{FM}) = 0.44 \phi(\text{FM}) - 0.15,$$

where  $\chi(\text{FM})$  represents the electronegativity of the FM layers;  $\chi(\text{spacer})$  represents the electronegativity of the spacer; and where  $\phi(\text{spacer})$  and  $\phi(\text{FM})$  are the work functions of the spacer and FM layers, respectively, as stated in Lange, "Handbook of Chemistry", 3-9 (1973, 11d). Both  $\chi$  and  $\phi$  values are expressed in electron volts (eV.).

Each chemical element has a work function  $\phi$  from which the  $\chi$  of that element is computed by equations (1b) or (1c). For alloys or compounds containing additional elements that constitute either the FM material or the conductive spacer used in the GMR or spin valve sensors, the  $\chi$  of such mixtures has been found to be an additive property of the constituents of the alloy. The  $\chi$  of the mixture is the sum of the products of the atomic fraction of any element in the mixture times the electronegativity of that

1 element summed over all elements constituting the mixture, as  
2 illustrated in the following equation:

$$(2) \quad \chi_{(a-b-c)} = f_a \chi_a + f_b \chi_b + f_c \chi_c,$$

3  
4  
5  
6 where  $f_a$ ,  $f_b$ , and  $f_c$  refer to the atomic fractions of elements a,  
7 b and c, respectively forming the alloy; and  $\chi_a$ ,  $\chi_b$  and  $\chi_c$  refer  
8 to the electronegativities of elements a, b and c, constituting  
9 the alloy. While only a ternary alloy has been considered for  
10 illustration purpose, it should be understood that the form of  
11 equation (2) is applicable to alloys with any number of elements.  
12 In addition, equation (2) applies both to ferromagnets and  
13 conductors.

14  
15 Prior art methods for fabricating spin valve and GMR sensors  
16 included combining spacers made of an electrically conductive  
17 elements such as Au, Ag or Cu, with layers of FM materials such  
18 as FeCo, NiFe, or elements such as Fe, Co and Ni, without regard  
19 to the electronegativity matching between the successive FM  
20 layers and conductive spacers. These prior art methods are mainly  
21 based on trial and error studies.

22  
23 The following Tables I and II provide listings of some exemplary  
24 conductors and ferromagnets, (i.e., FCC Systems and BCC Systems),  
25 respectively, that can be used to fabricate various devices,  
26 including but not limited to magnetoresistive sensors according  
27 to the invention.

28  
29 The values for  $\chi$  in Tables I and II were derived from electron  
30 work function data (as reported in Michaelson, "The Work Function  
31 of the Elements and Its Periodicity," Journal of Applied Physics,

vol. 48, No. 11, November 1977, p. 4729) and equations (1)(b) and (c). Generally, the work functions for randomly oriented crystal structures were used, but if data was provided by Michaelson for specific crystal faces or phases, such work function values were averaged to calculate an average work function, which was used to calculate the following  $\chi$  values. Further, if the work function for randomly oriented crystals was in the range of such average work function value (i.e., within five percent), the randomly oriented value was added to the previously described work function values and used to compute a second average work function value, which was then used to compute the  $\chi$  values below. For alloys or compounds, equation (2) was used to compute the  $\chi$  values below.

TABLE I - FCC SYSTEMS

CONDUCTORS	$\chi$ (eV.)	FERROMAGNETS	$\chi$ (eV.)
Cu	1.91	80Ni:20Fe	2.084
Ag	1.89	Ni <sub>3</sub> Fe <sup>(4)</sup>	2.07
Ag <sub>3</sub> Pt <sup>(5)</sup>	2.00	Au	2.22-2.27 <sup>(3)</sup>
Ni <sub>3</sub> Mn <sup>(4)</sup>	2.02	Fe <sub>4</sub> N	2.12
Pt	2.34	FePd	2.11
Pd	2.32	Fe <sub>1-y</sub> Au <sub>y</sub> <sup>(1)</sup>	$2.0 \leq \chi \leq 2.13$
Cu <sub>3</sub> Pt <sup>(4)</sup>	2.02	Co <sub>1-z</sub> Au <sub>z</sub> <sup>(2)</sup>	$2.07 \leq \chi \leq 2.14$
CuPt <sup>(4)</sup>	2.13	Fe <sub>0.485</sub> Ni <sub>0.418</sub> Mn <sub>0.097</sub>	1.99
CuPt <sub>3</sub> <sup>(4)(5)</sup>	2.23	80Ni:20Fe	2.084
Cu <sub>3</sub> Pt <sub>5</sub> <sup>(4)(5)</sup>	2.18	81Ni:19Fe	2.086
Cu <sub>3</sub> Au <sup>(4)</sup>	1.99-2.00 <sup>(3)</sup>	90Co:10Fe	2.04
Cu <sub>3</sub> Pd <sup>(4)(5)</sup>	2.01	80Ni:20Fe	2.084
CuPd <sup>(4)</sup>	2.06		

1 Rh 2.04  
 2 CuAu<sup>(4) (5)</sup> 2.07-2.09<sup>(3)</sup>

3  
 4 <sup>(1)</sup> Where y is an atomic fraction with a value between 0.30 and  
 5 0.70;

6 <sup>(2)</sup> where z is an atomic fraction with a value between 0.10 and  
 7 0.50;

8 <sup>(3)</sup> the higher stated values for  $\chi$  reflect the use of a larger  
 9 work function for the <111> face of Au than that stated in  
 10 Michaelson, which adjustment appears necessary when work function  
 11 data for <111> faces of other FCC elements is compared to <110>  
 12 work function data; and

13 <sup>(4) (5)</sup> a pseudo-cubic structure, the stated composition is a  
 14 superlattice structure.

15  
 16 As noted, some of the compounds in Table I are pseudo-cubic, but  
 17 have lattice parameters close to FCC and provide a structure  
 18 match adequate for an FCC System.

19  
 20 TABLE II - BCC SYSTEMS

21 CONDUCTORS	$\chi$	22 FERROMAGNETS	$\chi$
23 Cr	1.83	24 Fe <sub>1-u</sub> Cr <sub>u</sub> <sup>(1)</sup>	1.85 ≤ $\chi$ ≤ 1.88
25 Cr	1.83	26 Fe <sub>1-w</sub> V <sub>w</sub> <sup>(2)</sup>	1.85 ≤ $\chi$ ≤ 1.87
27 Cr	1.83	28 Ternary FeCrV	1.84 ≤ $\chi$ ≤ 1.87
		29 alloys	
30 Cr	1.83	Fe <sub>3</sub> Al <sup>(3)</sup>	1.86
AlFe <sub>2</sub>	1.84		

31  
 32 <sup>(1)</sup> Where u is an atomic fraction with a value between 0.40 and  
 33 0.70;

(2) where w is an atomic fraction with a value between 0.25 and 0.35; and  
(3) the stated composition is a superlattice structure.

The following examples are provided for the purpose of illustration and explanation only. They are not intended to be exclusive or to limit the coverage of the present inventive concepts, including the selection process and the sensors. All compositions in the following examples are given in atomic percentage:

Example 1

In Table I above, the electronegativities of the conductors and the ferromagnets represent the atomic fraction weighted electronegativities, as illustrated by the following example for  $\text{Cu}_3\text{Pt}$ :

$$\chi(\text{Cu}_3\text{Pt}) = 0.75\chi(\text{Cu}) + 0.25\chi(\text{Pt}) = 2.02,$$

where  $\chi(\text{Cu}_3\text{Pt})$  is the electronegativity of  $\text{Cu}_3\text{Pt}$ ;  $\chi(\text{Cu}) = 1.91$ ; and  $\chi(\text{Pt}) = 2.34$ . This example illustrates that the atomic fraction of the electronegativities of the elements of any alloy conductor or ferromagnet formed of any number of elements, i.e., ternary, quaternary, etc., can be used to calculate the electronegativity of the alloy.

By using Table I above, it is possible to closely match the electronegativities of the conductors and the ferromagnets. For example, having selected  $\text{Cu}_3\text{Pt}$  as the conductor of choice, it would be desirable to select a FM material having a close electronegativity. Table I indicates that one of the closest

1 materials whose electronegativity matches that of  $\text{Cu}_3\text{Pt}$  is  $\text{Ni}_3\text{Mn}$ ,  
2 since the average electronegativity of  $\text{Ni}_3\text{Mn}$  is 2.01 and  $\Delta\chi$  of  
3 the combination is approximately  $|0.01|$ .  
4

5 Example 2

6 Another aspect of the invention concerns the use of materials  
7 exhibiting superlattice structures for FM layers and spacers in  
8 GMR and spin valve sensors. The prior art does not teach or  
9 disclose the use of such superlattice structures in MR sensors.  
10 Significant advantages in MR device performance can be achieved  
11 with such superlattice structures, even without the matching of  $\chi$   
12 values.  
13

14 For example,  $\text{Ni}_3\text{Mn}$ , a ferromagnetic superlattice intermetallic  
15 compound having an electronegativity of 2.01, may be matched with  
16  $\text{Cu}_3\text{Pt}$ , as described in Example 1. The matching of two  
17 superlattice structures is desirable in that these ordered  
18 structures will improve the thermal stability of sensors  
19 containing them. It is believed that this is due to the  
20 additional external thermal energy that would be required to  
21 disorder one or both superlattice structures before the elements  
22 contained in the superlattice would be free to diffuse at the  
23 interface. This additional energy ranges between 0.1 eV to 0.3  
24 eV above the activation energy for diffusion across the interface  
25 between the conductor spacer and the FM layer and accordingly  
26 leads to greater thermal stability of the device. Greater  
27 corrosion resistance would also be achieved for such devices.  
28

29 Example 3

30 A subsequent inquiry may then be made as to whether there exists  
31 another ferromagnet with other desirable characteristics, such as



1 minimal magnetostriction ( $\lambda_s$ ), higher corrosion resistance,  
2 and/or lower resistivity than  $\text{Ni}_3\text{Mn}$ .  $\text{Ni}_3\text{Fe}$ , also a superlattice  
3 alloy, with an electronegativity of 2.07, may in certain  
4 applications present a more desirable match than  $\text{Ni}_3\text{Mn}$ , due to  
5 low coercivity ( $H_c$ ), low  $\lambda_s$  and superior corrosion resistance  
6 and may be matched with a CuAu superlattice having an  $\chi$  of 2.07.

#### 8 Example 4

9 This example identifies conductive spacer alloys useful for the  
10 matching or minimizing the  $\Delta\chi$  values between the spacer alloys  
11 and appropriate ferromagnetic elements or alloys thereof.

12  
13 In addition to CuAu and CuPt alloys and their superlattice  
14 compositions referred to previously, binary, ternary or higher  
15 order alloys of elements such as Cu, Ag, Au, Pt, Pd, Ir, Rh and  
16 Ru may be used to match appropriate FMs and provide  $\chi$  values  
17 ranging from approximately 1.89 to 2.33. Such alloys may be used  
18 to fabricate various devices, including but not limited to spin  
19 valve and GMR sensors, based on the electronegativity matching or  
20 minimizing of the differences in electronegativities of the  
21 present invention. Other superlattice alloys similar to CuPt and  
22 CuAu that exhibit ordering phenomena, such as  $\text{Ag}_3\text{Pt}$  and AgPt, may  
23 also be used for implementing this invention.

#### 25 Example 5

26 A subsequent inquiry may then be made as to whether the  
27 crystallographic structures of the adjacent conductive spacer and  
28 the FM layer are matched. It is desirable to match the  
29 crystallographic structures of adjacent layers. The following is  
30 a list of additional intermetallic compounds having a FCC

1 crystallographic structure for use as conductive spacer  
2 materials:

	$\chi$	
5	AgPt <sub>3</sub>	2.23
6	CrIr <sub>3</sub>	2.20
7	Cr <sub>2</sub> Pt	2.00

9 The following is a list of additional conductive spacer elements  
10 having a BCC crystallographic structure:

12		$\chi$		$\chi$		$\chi$
13	Cr	1.83	V	1.74	Mo	1.83
14	W	1.80	Nb	1.74	Ta	1.67

16 A number of the above elements such as W, Ta and Mo occur in high  
17 resistivity structures when deposited by evaporation or sputtering.

18 However, by controlling deposition parameters (such as rates,  
19 substrate temperatures, and partial inert gas pressures, e.g., Ar),  
20 a low resistivity structure can be obtained, which is preferred for  
21 spacers in spin valve and GMR structures.

23 The following is an example confirming the desirability of matching  
24 the crystallographic structures of adjacent FM/spacer layers. Even  
25 though the electronegativity of Fe (1.90) closely matches the  
26 electronegativity of Ag (1.89), the resulting  $\Delta R/R$  of the FeAg  
27 structure is small because of the Fe and Ag crystal structure  
28 dissimilarities and attendant potential barriers accruing  
29 therefrom. Specifically, Fe has a BCC structure, while Ag has an  
30 FCC structure.

Example 6

The foregoing inventive principles and examples are applicable at room temperature as well as other temperatures, such as cryogenic temperatures, e.g., 5 °K. Fe having a BCC structure and an electronegativity of 1.90, and Cr having a BCC structure as well and an electronegativity of 1.83 results in a very high  $\Delta R/R$ . This electronegativity mismatch is the smallest one experimentally measured, i.e., 0.07 and results in attainment of the highest observed  $\Delta R/R$  (approximately 150 percent) at a 5° Kelvin measurement temperature.

Fig. 3 illustrates the linear relationship between the magnetoresistive response as characterized by  $\Delta R/R$  of the spin valve sensor 10 (Fig. 1), relative to a square root of the absolute value of the electronegativity difference, (i.e.,  $|\Delta\chi|^{1/2}$ ) of the FM layers FM1, FM2 and the spacer 12, at room temperature, for a coupling field less than or equal to approximately 10 Oersteds. This linear relationship is represented by a curve S1. It is maintained for various spin valve layer compositions, representing a variety of spacer materials and FM materials and illustrates that the variable  $\Delta\chi$  controls  $\Delta R/R$ . This relation may be expressed generally by the following equation (3):

$$(3) \Delta R/R \cong A - B |\Delta\chi|^{1/2},$$

where A and B are constant values.

Sample preparation variables may affect the slope B of this equation (3). It is generally recognized in the literature that a certain degree of roughness at the interface between the FM layers

1 and the conductive spacers produces a maximum result ( $\Delta R/R$ ) for a  
2 given interface, for instance, Dieny, "Giant Magnetoresistance in  
3 Spin-Valve Multilayers", Journal of Magnetism and Magnetic  
4 Materials, 136 (1994) pp. 335-359. As the roughness increases or  
5 decreases from its optimal value  $\Delta R/R$  will decrease from its  
6 optimal value. This will change the slope B, but will not modify  
7 the general principles of the invention. Roughness variations will  
8 also not modify the intercept where  $\Delta R/R$  equals 0, which remains at  
9  $|\Delta\chi|^{\frac{1}{2}}$  equals 0.5.

10  
11 When spin valves and GMR sensors achieve the condition described by  
12  $|\Delta\chi|^{\frac{1}{2}}$  equal to or greater than 0.5, then  $\Delta R/R$  equals 0 and B equals  
13 approximately 2A. In this case, equation (3) may be expressed as  
14 follows:

15  
16 (4)  $\Delta R/R \approx A - 2A |\Delta\chi|^{\frac{1}{2}}$   
17

18 In an exemplary embodiment of the spin valve sensor 10, the general  
19 equation (3) may be expressed by the following experimentally  
20 derived equation (5) for spin valves formed by a variety of  
21 interfaces:  
22

23 (5)  $\Delta R/R = 32.3 - 64.6 |\Delta\chi|^{\frac{1}{2}}$   
24

25 The following interfaces were used in deriving this equation:  
26 Co/Cu/Co, Co/Cu/80Ni:20Fe, 80Ni:20Fe/Cu/80Ni:20Fe, Co/Au/80Ni:20Fe,  
27 Ni/Cu/Ni, 80Ni:20Fe/Pt/80Ni:20Fe and 80Ni:20Fe/Pd/80Ni:20Fe. The  
28 following experimental examples verify equation (5) above.  
29

30 Example 7

Point D on curve S1 in Fig. 3 represents the following FM layer/spacer compositions: Co/Cu/Co, where the first element Co is the unpinned FM layer FM1, the second element Cu is the conductive spacer 12 (Fig. 1), and the third element Co is the pinned FM layer FM2. Pursuant to equation (5), the composition of this example yields a  $\Delta R/R$  of approximately 9.5 percent.

#### Example 8

Point E on curve S1 in Fig. 3 represents Co/Cu/80Ni:20Fe, where the first element Co is the unpinned FM layer FM1 (Fig. 1), the second element Cu is the conductive spacer 12, and the third element 80Ni:20Fe is the pinned FM layer FM2. Pursuant to equation (5), the composition of this example yields a  $\Delta R/R$  of approximately 6.5 percent.

#### Example 9

Point F on curve S1 in Fig. 3 represents 80Ni:20Fe/Cu/80Ni:20Fe, where the first element 80Ni:20Fe is the unpinned FM layer FM1 (Fig. 1), the second element Cu is the conductive spacer 12, and the third element 80Ni:20Fe is the pinned FM layer FM2. Pursuant to equation (5), the composition of this example yields a  $\Delta R/R$  of approximately 5 percent.

#### Example 10

Point G on curve S1 in Fig. 3 represents Co/Au/80Ni:20Fe, where the first element Co is the unpinned FM layer FM1 (Fig. 1), the second element Au is the conductive spacer 12, and the third element 80Ni:20Fe is the pinned FM layer FM2. Pursuant to equation (5), the composition of this example yields a  $\Delta R/R$  of approximately 4.5 percent.

Example 11

Point H on curve S1 in Fig. 3 represents Ni/Cu/Ni, where the first element Ni is the unpinned FM layer FM1 (Fig. 1), the second element Cu is the conductive spacer 12, and the third element Ni is the pinned FM layer FM2. Pursuant to equation (5), the composition of this example yields a  $\Delta R/R$  of approximately 2.5 percent.

Example 12

Point I on curve S1 in Fig. 3 represents 80Ni:20Fe/Pt/80Ni:20Fe, where the first alloy 80Ni:20Fe is the unpinned FM layer FM1 (Fig. 1), the second element Pt is the conductive spacer 12, and the third alloy 80Ni:20Fe is the pinned FM layer FM2. Pursuant to equation (5), the composition of this example yields a  $\Delta R/R$  of approximately 0.3 percent.

Example 13

Point J on curve S1 in Fig. 3 represents 80Ni:20Fe/Pd/80Ni:20Fe, where the first alloy 80Ni:20Fe is the unpinned FM layer FM1 (Fig. 1), the second element Pd is the conductive spacer 12, and the third alloy 80Ni:20Fe is the pinned FM layer FM2. Pursuant to equation (5), the composition of this example yields a  $\Delta R/R$  of approximately 0.2 percent.

The  $\Delta\chi$ s in examples 7, 8, 9 and 11 yield positive values, whereas examples 10, 12 and 14 yield negative values of  $\Delta\chi$ ; however, by using the absolute value, i.e.,  $|\Delta\chi|^{1/2}$ , all combinations are predicted by the results of equation 5. This illustrates that the interfacial barrier characteristics are indifferent to the sign of  $\Delta\chi$  and only respond to its magnitude.

Example 14

Point K on curve S1 in Fig. 3 represents 80Ni:20Fe/Al/80Ni:20Fe, where the first alloy 80Ni:20Fe is the unpinned FM layer FM1 (Fig. 1), the second element Al is the conductive spacer 12, and the third alloy 80Ni:20Fe is the pinned FM layer FM2. The square root of the electronegativity difference  $|\Delta\chi|^{1/2}$  between Al and its adjacent first alloy layer FM1 is approximately 0.6/eV, which is greater than the intercept point value of 0.5 eV. In this and other similar examples where  $|\Delta\chi|^{1/2}$  is greater than 0.5 eV, i.e., greater than the intercept point, then  $\Delta R/R$  is set equal to zero. This example illustrates that even when the crystallographic structures of adjacent layers are matched, i.e., both 80Ni:20Fe and Al have FCC structures, the sensor output signal ( $\Delta R/R$ ) may be low because the  $\chi$ s of the layers are not matched. However, Al may be useful if its  $\chi$  is matched with that of an appropriate FM material.

While the relationship described in the equations above, i.e., between the sensor output signal ( $\Delta R/R$ ) and the absolute difference in electronegativities of adjacent layers has been described in view of data obtained at room temperature, further analyses confirm that these relationships are also valid for data obtained at other temperatures, including the normal sensor operating temperatures and at cryogenic temperatures as well. It should however be noted that, as shown in Fig. 4, the slope of the curve S1, i.e., the constant value A, will vary at different temperatures.

The relationship between  $\Delta R/R$  and  $|\Delta\chi|$  as previously expressed has been developed for spacer materials having bulk resistivities

of approximately less than  $10 \mu\Omega\text{-cm}$ . It is expected that some deviation from the linear relationship between  $\Delta R/R$  and  $|\Delta\chi|^{\frac{1}{2}}$  will occur for larger resistivities in the spacer materials, i.e., a partial loss in the expected value of  $\Delta R/R$  with increasing resistivity of the spacer material above the range of approximately  $10 \mu\Omega\text{-cm}$ .

The following examples 15 through 17 are made with reference to Fig. 4 which illustrates the temperature insensitivity of the linear relationships between the  $\Delta R/R$  of the spin valve sensor 10 (Fig. 1) relative to the square root of the absolute value of the electronegativity difference  $|\Delta\chi|^{\frac{1}{2}}$  of the average electronegativity of the pinned and unpinned FM layers FM1 and FM2 and the spacer 12. The response is shown at three different measurement temperatures, that is,  $300^\circ\text{K}$ ,  $200^\circ\text{K}$  and  $100^\circ\text{K}$ .

#### Example 15

This example is represented by the curve V1 of Fig. 4 and graphically plots the linear relationship of equation (3) at a measurement temperature of  $100^\circ\text{K}$ . Points a, b and c reflect data for the following respective spin valve (Fig. 1) combinations:

unpinned FM layer FM1: Co (point a), 80Ni:20Fe (point b),  
and Ni (point c),  
pinned FM layer FM2: (80Ni:20Fe), and  
conductive spacer: Cu with an approximate thickness of  $22\text{\AA}$ .

The  $\chi$  values used for the FM layers are the average of pinned and free layers,  $(\chi_{\text{free}} + \chi_{\text{pinned}})/2$ .



1  
2           Example 16

3   This example is represented by the curve V2 and graphically plots  
4   the linear relationship at a temperature of 200°K. Points d, e  
5   and f reflect data observed for similar compositions as in  
6   Example 15 above.

7  
8           Example 17

9   This example is represented by the curve V3 and graphically plots  
10   the linear relationship at a temperature of 300°K. Points g, h  
11   and i reflect data observed for similar compositions as in  
12   Examples 15 and 16 above.

13  
14   For spin valve structures, the conductive spacer separating the  
15   FMs is generally between 18Å° and 30Å° thick, while the FMs  
16   generally range between 30Å° and 120Å° with an optimum thickness  
17   typically near 60Å° each.

18  
19   Prior to the teaching of the relationships of the forms of  
20   equations (3) and (4), no known method to maximize  $\Delta R/R$  was  
21   available in the prior art. By using equations (3) and (4) it is  
22   now possible to rationalize the selection of the materials  
23   forming the FM layers and the conductive spacers, thus  
24   substantially minimizing or eliminating the need for conventional  
25   trial and error selection processes. Consequently, the selection  
26   process can now be automated and/or rationalized, and significant  
27   cost savings can be achieved in the development of superior spin  
28   valve and GMR sensors. More particularly, an appropriate  
29   selection of materials can significantly improve the signal

output of the spin valve sensor 10 (Fig. 1), which is a result that is highly sought and of great commercial value.

Fig. 5 illustrates that the linear relationship of equation (3) for the GMR sensor 20 (Fig. 2) is exhibited for distinct MR peaks at particular spacer thicknesses.  $\Delta R/R$  was measured at room temperature, for various Co Ni alloys. The resulting relationships are represented by three exemplary curves G1, G2, G3, and are for various GMR FM layer compositions. The curves G1, G2, G3 may be expressed generally by the following equations (6), (7) and (8), that continue to verify the relationships of equations (3) and (4).

Curve G1 in Fig. 5 may be expressed by the following equation (6), and represents the GMR first peak at a Cu thickness of approximately 10A°:

$$(6) \quad \Delta R/R \cong 245 - 490 |\Delta\chi|^{\frac{1}{2}}.$$

Curve G2 in Fig. 5 may be expressed by the following equation (7), and relates to the second GMR peak at a Cu thickness of approximately 22A°:

$$(7) \quad \Delta R/R \cong 110 - 220 |\Delta\chi|^{\frac{1}{2}}.$$

Curve G3 in Fig. 5 may be expressed by the following equation (8), and represents the third GMR peak at a Cu thickness of approximately 32A° to 36A°:

$$(8) \quad \Delta R/R \cong 45 - 90 |\Delta\chi|^{\frac{1}{2}}.$$

1  
2 While only three GMR peaks are shown in Fig. 5, well defined  
3 peaks at a fourth position (i.e., peaks 1 through 4) have been  
4 observed in GMR devices. These peaks generally occur at spacer  
5 thicknesses of approximately 10A°, 20A°, 30A° and 40A°. It is  
6 known that both the peak  $\Delta R/R$  and the switching field required  
7 to attain the maximum value of  $\Delta R/R$  (at any peak) decline with  
8 increasing peak number (and increasing spacer thickness).  
9 However, the switching field at each increasing peak declines  
10 more rapidly than does  $\Delta R/R$  at each peak. Thus, the sensitivity  
11 of the transducer as measured by  $\Delta R/R$ /Oersted of switching field  
12 improves dramatically with increasing peak number. Consequently,  
13 the present invention is particularly useful in extending GMR  
14 performance to higher peak values at lower switching fields due  
15 to the minimizing of  $\Delta\chi$  between FM and spacer layers. Thus, the  
16 present invention maximizes the device sensitivity at any peak  
17 but is most useful at large peak numbers that are inherently more  
18 sensitive, i.e., achieving a larger ( $\Delta R/R$ /Oersted) than has been  
19 reported. Depending on the particular application, it is possible  
20 to select any of the GMR peaks. Additionally, in GMR structures  
21 the FM layers may range in thickness from approximately 4A° to  
22 25A°  
23  
24 By using equations (3) and (6), (7) and (8) it is possible to  
25 simplify the selection of the materials forming the various FM  
26 layers and conductive spacers 22 of the GMR sensor 20 (Fig. 2),  
27 similarly to what has been explained above in relation to the  
28 spin valve sensor 10 (Fig. 1). Again, the control of the  
29 interfacial roughness at the FM/spacer contact will be required  
30 to achieve maximum  $\Delta R/R$ .

1  
2 In addition, the following exemplary embodiments demonstrate that  
3 by a proper selection of the composition of the materials forming  
4 the sensor 20 (Fig. 2), and by matching or substantially  
5 minimizing the absolute electronegativity difference (or  
6 mismatch) of the sensor layers (FM layers and conductive  
7 spacers), it is possible to obtain significantly higher output  
8 signals ( $\Delta R/R$ ) than those previously attained. The foregoing  
9 linear relationships were mostly obtained using data at room  
10 temperature. Further analyses confirm that these relationships  
11 are also valid for data obtained or derived at other  
12 temperatures, including the sensor normal operating temperatures  
13 of approximately 45°C and cryogenic temperatures as well.  
14 However, the slopes of the curve G1, G2 and G3, i.e., the value  
15 B, will vary at different temperatures.

16  
17  
18 An important aspect of the present invention may be derived from  
19 equations (6), (7) and (8), namely that all the curves G1, G2 and  
20 G3 converge at a single intercept point (I), at which  $\Delta R/R$   
21 equals 0, and  $|\Delta\chi|^*$  equals approximately 0.5, regardless of the  
22 measurement temperatures and material compositions of the layers.

23  
24 As previously stated, the need for optimizing the roughness of  
25 the interface for maximizing  $\Delta R/R$  for any particular interface  
26 is important. Accordingly, different preparation conditions,  
27 such as different substrate temperatures, different deposition  
28 rates and different sputtering pressure, will result in different  
29 degrees of interfacial roughness. Accordingly, an optimal  
30 interfacial surface roughness should be selected to maximize the

slopes of any curve G1, G2 or G3 and thereby achieving a maximum  $\Delta R/R$  for any interface  $\Delta x$  of the FM and spacer layers.

Example 18

Fig. 5 shows the value of  $\Delta R/R$  for a GMR structure at three peaks as a function of the following NiCo alloy compositions for the FM layer. On the first GMR peak curve G1 in Fig. 5, the following points represent the stated compositions:

Point H1: 30Ni:70Co  
 Point J1: Co  
 Point L1: 50Ni:50Co  
 Point M1: 70Ni:30Co  
 Point N1: 80Ni:20Co  
 Point P1: 90Ni:10Co  
 Point Q1: Ni

Example 19

On the second GMR peak curve G2 in Fig. 5, points R1 and S1 correspond to the respective compositions of points J1, H1, and M1 along the first peak curve G1. R1 is 50Ni:50Co; S1 is 70Ni:30Co; T1 is 80Ni:20Co; and U1 is Ni.

Example 20

On the third GMR peak curve G3 in Fig. 5, V1 is 30Ni:70Co; W1 is 50Ni:50Co; X1 is 70Ni:30Co; and Y1 is Ni.

All previous examples of the invention consisted of FM materials and spacers that were all FCC structure, i.e., FCC Systems. However, Fig. 6 illustrates that the linear relationship of equation (3) for the GMR sensor 20 (Fig. 2) at a temperature of

5° K is maintained when a BCC Systems is observed. The linear relationship is represented by an exemplary curves R1 (Fig. 6).

#### Example 21

On the GMR peak curve R1 (Fig. 6), the exemplary compositions are expressed as X-Y, where element X represents the material for the FM layers, and element Y represents the material for the conductive spacers 22.

<u>Point</u>	<u>X</u>	<u>Y</u>
g1	Fe	Cr
i1	Co	Cu
j1	Co	Ag

Points i1 and j1 both have FM and conductive spacer materials with FCC crystal structures (i.e., an FCC System). The FM and spacer materials at point g1, however, have BCC structures (i.e., a BCC System), and the latter point is also predicted by the linear relationship of the invention. For example, curve R1 in Fig. 6 may be expressed by the following equation (9), and relates to the GMR first peak:

$$(9) \quad \Delta R/R \cong 330 - 660 |\Delta\chi|^{\frac{1}{2}}$$

The foregoing example 21 confirms that both FCC and BCC Systems exhibit the same or substantially similar behavior as predicted by equations (3) and (4). Additionally it is shown that an FCC FM layer should be matched with an FCC conductive spacer, and a BCC FM layer should be matched with a BCC conductive spacer for best results. For example, when this crystal structure matching is maintained, (i.e., FCC on FCC and BCC on BCC FM and spacers), the relationships of equations 3 and 4 are exhibited.

1  
2 Point p on Fig. 6 represents the GMR structure Fe Cu. This  
3 structure presents an almost perfect electronegativity match  
4 (i.e., ( $|\Delta\chi| \approx 0.01$ ) between the Fe and Cu layers). Nonetheless,  
5 this structure does not provide a high  $\Delta R/R$  since Fe is a BCC  
6 structure, while Cu is a FCC structure. Accordingly, inferior  
7  $\Delta R/R$  is obtained and equations 3 and 4 are not observed due to  
8 additional potential barriers created by the crystal structure  
9 mismatch (i.e., BCC/FCC).

10  
11 Although the desirability of matching the crystal structure  
12 (i.e., FCC FM layer on an FCC spacer, or a BCC FM layer on an BCC  
13 spacer), has been described, the need to match such crystal  
14 structures may be mitigated in some instances. For example, a  
15 BCC element or alloy may be forced by epitaxial effects of an  
16 underlying FCC metal or alloy to form an FCC structure for a few  
17 monolayers (i.e., 0.5 to 7 monolayers (ML)). The reciprocal  
18 situation (i.e., an FCC material on a BCC material), would  
19 produce a similar epitaxial effect. Additionally, in FCC Systems  
20 some face centered tetragonal structures, representing nearly FCC  
21 systems, may be used to advantage as well.

22  
23 Fig. 7 is a chart that illustrates various exemplary combinations  
24 and compositions for the FM layers and spacers, some of which are  
25 explained by the following examples. In general, the FM layers  
26 may be selected from a group comprised of Fe, Co, Ni, and their  
27 alloys and their substitutional alloys. In addition, the  
28 conductive spacer layers may be selected from a group comprised  
29 of Au, Cu, Ag, Rh, Pt, Pd and substitutional alloys thereof, and  
30 other suitable elements or intermetallic compounds possessing

sufficiently low resistivities. The Heusler alloys shown in Fig. 7 will be discussed later.

#### Example 22

Fig. 8 shows two curves, SL1 and SL2, plotting the electrical resistivity in microhm-cm versus the atomic composition for the Cu Au alloy system. Curve SL1 illustrates the relationship for alloys that have been quenched and cold worked (i.e., in a disordered state). Curve SL2 illustrates the relationship for alloys that are annealed at 200°C for the purpose of achieving an ordered superlattice structure. Fig. 8 further shows that the electrical resistivities of the ordered alloy relative to the same composition of the disordered alloy may be reduced significantly by annealing the alloys having predetermined atomic compositions. In the Cu Au system shown in Fig. 8, two such predetermined atomic compositions appear, the first (CP1) at 25 atomic percent of Au, and the second (CP2) at 50 atomic percent of Au. These compositions, at which the electrical resistivities of the alloys exhibit a minimum, are a result of an ordered superlattice and will be referred to herein as Critical Points (CP). Additional description of superlattice structures may be found in C. Barrett, "Structure of Metals, Crystallographic Methods, Principles, and Data", 269-296 (1952 2d) which is incorporated herein by reference.

#### Example 23

Fig. 9 shows two curves SL3, SL4, plotting the electrical resistivity versus atomic composition for the Cu Pt alloy system. Curve SL3 illustrates the relationship for alloys that are quenched and cold worked (disordered state). Curve SL4 illustrates the relationship for alloys that are annealed at



1 300°C for achieving an ordered superlattice structure. Fig. 9  
2 further shows that the specific electrical resistivities of the  
3 ordered superlattice may be reduced significantly by annealing  
4 the alloys at two critical points CP3 (25 atomic percent Pt), and  
5 CP4 (50 atomic percent Pt).  
6

7 While points CP1 and CP2 (Fig. 8), and points CP3 and CP4 (Fig.  
8 9) reflect the most useful compositions, other compositions  
9 defined by the hatched areas A1 (Fig. 8) and B1, B2 (Fig. 9)  
10 between the envelopes of the disordered alloys (SL1, SL3) and the  
11 envelopes of the ordered alloys (SL2, SL4) may also be useful in  
12 providing a broader electronegativity selection range, while at  
13 the same time producing a partially ordered superlattice that  
14 will have some benefit in extending the thermal stability of spin  
15 valve and GMR sensors using the ordered alloys.  
16

17 For example, the two alloy series in examples 22 and 23 may be  
18 annealed at between 100°C to 300°C in thin film form for  
19 approximately 0.5 hour to 4 hours to form the superlattice or  
20 partially ordered superlattice at appropriate composition. The  
21 invention uses the superlattices processed at or near critical  
22 points CP or within any of the shaded regions in the Cu Au binary  
23 system or the Cu Pt binary system or other binary systems. The  
24 shaded regions define the composition range within which some  
25 degree of superlattice order will occur and which may be used  
26 advantageously. The most advantageous compositions from a  
27 resistivity point of view are a 25 and 50 atomic percent Cu for  
28 both the Cu Au and Cu Pt systems. These superlattice alloys and  
29 compositions can be utilized to match or minimize the  
30 electronegativity difference of 80Ni:20Fe, for example, more  
31 advantageously. The benefits are shown in the following examples.

1 Similar superlattice alloys in the Cu Pd system ( $\text{Cu}_3\text{Pd}$  or  $\text{CuPd}$ )  
2 may be used to advantage as well.

#### 4 Example 24

5 A superlattice spacer 22 (Fig. 2) will provide a large mean free  
6 path for electrons in the spacer while simultaneously minimizing  
7 the electronegativity difference  $|\Delta\chi|$  between the FM layers and  
8 the superlattice spacers 22. For example, the Cu Pt superlattice  
9 alloy (Fig. 9) exhibits a resistivity of about  $3.5 \mu\Omega\text{-cm}$ , which  
10 is similar to the resistivity of gold, and an average  
11 electronegativity of approximately 2.07 eV.

12  
13 In this example 80Ni:20Fe is used as an FM layer. The  
14 electronegativity of 80Ni:20Fe is about 2.084 eV and the  
15 electronegativity of the CuPt superlattice alloy CP4 is  
16 approximately 2.07 eV, resulting in an absolute electronegativity  
17 difference  $|\Delta\chi|$  of about 0.014 eV. This excellent match will  
18 significantly minimize the detrimental interfacial scattering  
19 component in the spin valve sensor 10 (Fig. 1) and the GMR sensor  
20 20 (Fig. 2), and results in maximizing sensor signal output  
21  $\Delta R/R$ . This example also exhibits improved corrosion resistance  
22 and thermal stability. In addition, adverse electromigration  
23 effects in the sensor are minimized.

#### 24 Example 25

25  
26 In this example, the Cu Au superlattice alloy CP2 of Example 22  
27 (Fig. 8) is used as a spacer, while Co is used as an FM layer.  
28 Since the electronegativity of Co is about 2.05 eV and the  
29 electronegativity of the Cu Au superlattice alloy CP2 is  
30 approximately 2.07 eV, thus resulting in an absolute

1 electronegativity difference  $\Delta\chi$  of 0.02, which provides an  
2 excellent electronegativity match.

3  
4 Example 26

5 In this example, a Cu Au superlattice CP2 (Fig. 8) is used as a  
6 spacer, while an  $\text{Ni}_3\text{Fe}$  superlattice composition forms the FM  
7 layers. The average electronegativity of the Cu Au superlattice  
8 CP2 is about 2.07, which has an absolute electronegativity  
9 difference of about 0.01 with the  $\text{Ni}_3\text{Fe}$  superlattice.

10  
11 In addition to increasing the sensor output signals (represented  
12 by, for example  $\Delta R/R$ ), the dual superlattice structure increases  
13 the thermal stability as well as the chemical stability of the  
14 sensors 10 and 20 (Fig. 1 and 2). Since the superlattice alloys  
15 are greatly more corrosion resistant than copper and the  
16 ferromagnet alloys, the sensors 10 and 20 using the superlattices  
17 formed at or near CPs result in a structure of superior  
18 electromigration characteristics as well.

19  
20 As mentioned earlier, one method for processing the superlattice  
21 alloys is to anneal them between 100°C to 300°C for 10 to 200  
22 minutes. An alternative method is to deposit the superlattice  
23 alloys by sputtering or evaporation, at a relatively low rate, on  
24 a sufficiently heated substrate. This slow deposition process  
25 could form the superlattice structure without the need for  
26 further thermal annealing.

27  
28 Another advantage for using superlattice structures is that such  
29 structures have high critical temperatures above which they  
30 become disordered. These critical temperatures can exceed 300°C  
31 in bulk, that is well above the normal operating temperatures of

1 the sensors 10 and 20 and also exceed the processing temperatures  
2 normally used in preparing the sensors or superimposed write  
3 structures for some devices.

4  
5 The materials that may be used for FM layers to achieve the  
6 preceding objective of minimizing  $\Delta\chi$  are from the group of alloys  
7 constituting (1) Fe, Ni, Co, or any combination of these  
8 elements, and (2) any of the following elements or combinations  
9 thereof: Au, Cu, Cr, Mn, Ti, V, Pt, Pd, Ru, Ir, Sn, Ta, Nb, Rh,  
10 N, C, Zr, Hf, Y, La, and rare earth elements, having either FCC  
11 or BCC structures or in amorphous forms containing a combination  
12 of the above elements. A more extensive list of  $\chi$  values that may  
13 be used to implement the invention is provided in Appendix A,  
14 which is incorporated by reference. The values of  $\chi$  in Appendix A  
15 were calculated using the data and methods described previously  
16 in reference to Tables I and II.

17  
18 Example 27

19 An additional example of desirable alloys to implement the  
20 invention is provided by the following group of quaternary FM  
21 alloys having minimal magnetostriction:

22  
23  $(48\text{Co}:29\text{Ni}:23\text{Fe})_{(1-y)}\text{Pd}_y$ , and  $(26\text{Co}:44\text{Ni}:30\text{Fe})_{(1-y)}\text{Pd}_y$   
24

25 In the foregoing two alloys,  $y$  is an atomic fraction of Pd with a  
26 value between 0.12 to 0.30. These alloys display near zero  
27 magnetostriction and low coercivity.

28  
29 Also, the following alloys have near zero magnetostriction and  
30 have  $\chi$  values of 2.13. Each alloy can be matched with the

1 superlattice conductive spacer of CuPt whose  $\chi$  is approximately  
2 2.12:

3  
4 33.6Co:20.3Ni:16.1Fe:30Pd, and  
5 18.2Co:30.8Ni:21Fe:30Pd.  
6

7 All previous examples were directed to randomly oriented crystals  
8 of ferromagnets and conductive spacers. Because various crystal  
9 faces are equally presented to a growing surface during the  
10 fabrication of spin valve or GMR sensors, the electronegativity  
11 of a randomly oriented crystallographic surface is expressed by  
12 equation (10) wherein  $\chi$  of each of the principal crystal faces  
13 (i.e.,  $\langle 111 \rangle$ ,  $\langle 100 \rangle$  and  $\langle 110 \rangle$ ), contributes equally to the  
14 randomly oriented value of  $\chi$ , as expressed by the following  
15 equation:  
16  
17  
18

$$(10) \quad \chi(\text{randomly oriented}) = 1/3 (\chi_{111} + \chi_{100} + \chi_{110})$$

19  
20  
21 Fig. 10 illustrates the use of randomly oriented crystals in the  
22 spin valve sensor 10 of Fig. 1. In this example, the crystalline  
23 orientation of the substrate is random, and therefore the three  
24 crystallographic orientations (i.e.,  $\langle 100 \rangle$ ,  $\langle 110 \rangle$ ,  $\langle 111 \rangle$ ), have  
25 approximately the same frequency of surface occupancy on the  
26 substrate. As a result, the FM layer that is formed on top of the  
27 substrate will develop the same random orientation as the  
28 substrate by epitaxy. It is an object of the present invention to  
29 match the average electronegativity of each layer to the average  
30 electronegativity of the adjacent layers.  
31

The following example 28 illustrates the effect of the mismatch of the electronegativity  $|\Delta\chi|$  on the various crystal faces  $\langle 100 \rangle$ ,  $\langle 110 \rangle$ ,  $\langle 111 \rangle$  of Ni and Cu.

#### Example 28

The electronegativity values and the electronegativity difference for the three faces of Cu and Ni are listed in the following table (data from Michaelson):

<u>Spacer Layer</u>			<u>FM Layer</u>		
<u>Cu (face)</u>	<u><math>\chi_{\text{Cu}}</math> (face)</u>		<u>Ni (face)</u>	<u><math>\chi_{\text{Ni}}</math> (face)</u>	<u><math> \Delta\chi ^{1/2}</math> (face)</u>
Cu(111)	2.041		Ni (111)	2.204	0.404
Cu(100)	1.87		Ni(100)	2.146	0.525
Cu(110)	1.821		Ni(110)	2.068	0.498

Applying equation (5) above, we can illustrate the impact on  $\Delta R/R$  as a function of the face, assuming random crystal orientation for a spin value having Ni FM layers and a Cu spacer layer:

$$\Delta R/R = \frac{1}{3} \{ [32.30 - 64.60(0.404)]_{111} + [32.30 - 64.60(0.525)]_{100} + [32.30 - 64.60(0.498)]_{110} \}$$

In this equation, if  $|\Delta\chi|^{1/2}$  is equal or greater than 0.5 then  $\Delta R/R$  is set equal to zero (see Fig. 3), and thus:

$$\Delta R/R = \frac{1}{3} (6.21 + 0 + 0.19)\% \cong 2.13\%$$

This value approximates the experimentally observed value of 2.5 percent provided in example 11, thus indicating that there is a

1 probable weak preferred orientation in the sample, and it was not  
2 completely random. This example illustrates that essentially one  
3 crystal plane, in this case  $\langle 111 \rangle$  plane, contributes over  
4 approximately 90 percent of the  $\Delta R/R$  observed value.

5  
6 Thus, it is an aspect of this invention to select FM and spacer  
7 layers having a single crystallographic orientation that will  
8 maximize  $\Delta R/R$ , e.g. Ni FM layers and Cu spacer layers each  
9 having  $\langle 111 \rangle$  crystal orientations, and achieve significant  
10 improvement in spin value sensor performance. The same aspect  
11 applies to GMR structures.

12  
13 In the above example, it was demonstrated in the Ni-Cu multilayer  
14 system that approximately 90 percent of  $\Delta R/R$  was due to crystals  
15 in the spin valve layers having a  $\langle 111 \rangle$  crystallographic  
16 orientation. It is well known that even in films with random  
17 surface orientations of  $\langle 111 \rangle$ ,  $\langle 100 \rangle$  and  $\langle 110 \rangle$  planes, epitaxy of  
18 the succeeding Cu and FM films will occur, i.e., the orientation  
19 effect is carried throughout the structure of the deposited  
20 layer.

21  
22 The electronegativity matching between adjacent layers, as  
23 described in the foregoing equations may be implemented either  
24 with polycrystalline FM layers and spacers having preferred  
25 crystallographic orientations or single crystal FM layers and  
26 spacers having preferred orientations. Fig. 11 illustrates the  
27 use of polycrystalline FM layers and spacers having a preferred  
28 orientation in the spin valve sensor 10 of Fig. 1. In this  
29 example the surface crystalline orientation of the substrate has  
30 been selected to be  $\langle 111 \rangle$ . As a result, the subsequent crystal  
31 FM layer and spacers that are formed will develop the same  $\langle 111 \rangle$

1 surface orientation. It is an object of the present invention to  
2 match the electronegativities of the selected crystalline  
3 orientation, which in this example is  $\langle 111 \rangle$ , of the juxtaposed  
4 layers, rather than to match the average electronegativities of  
5 these layers.

6  
7 According to a preferred embodiment, the spin valve sensor 10  
8 (Fig. 1) is formed by selecting a desired spacer material and a  
9 preferred one of its three main crystalline orientations, for  
10 example  $\langle 111 \rangle$ . Subsequently, the FM layers are selected such  
11 that the  $\chi$  of their corresponding faces with a  $\langle 111 \rangle$  crystalline  
12 orientation matches or substantially approximates the  $\chi$  of the  
13 selected spacer crystalline face (i.e.,  $\langle 111 \rangle$ ). Similarly, the  
14  $\langle 110 \rangle$  and  $\langle 100 \rangle$  surface faces can be matched as well by selecting  
15 the proper alloys.

#### 16 17 EXAMPLE 29

18 The selection of a preferred crystal orientation (i.e.,  $\langle 111 \rangle$ ,  
19  $\langle 100 \rangle$  or  $\langle 110 \rangle$ ), can be accomplished by selecting a substrate  
20 such as magnesium oxide with a surface orientation of either  
21  $\langle 111 \rangle$ ,  $\langle 100 \rangle$  or  $\langle 110 \rangle$ . By selecting a single orientation, for  
22 example  $\langle 111 \rangle$ , of the substrate and subsequently selecting a  
23 ferromagnet and conductive spacer whose  $\Delta\chi$ 's for the selected  
24 crystal orientations are minimized, and subsequently depositing  
25 alternating layers of FM and conductive spacers on such an  
26 oriented substrate, the resulting  $\Delta R/R$ 's will be greater than FM  
27 and spacer structures having randomly oriented crystals.

28  
29 Prior to the deposition of alternating ferromagnets and spacers  
30 with preferred crystallographic orientations, it would be  
31 desirable to deposit a layer of Pt, Pd, Au or Cu of 10 Å to 50 Å



1 with subsequent annealing at approximately 250-400°C to establish  
 2 an epitaxial-oriented metal film from which subsequent epitaxy of  
 3 the selected alternating FM and spacer materials are then  
 4 subsequently deposited, with epitaxial integrity maintained at  
 5 each subsequent layer in the formation of a spin valve or GMR  
 6 structure.

7  
 8 Since interfacial diffusion kinetics between the FM and the  
 9 conductor spacer are expected to be a function of selected  
 10 crystal orientation (i.e.,  $\langle 111 \rangle$ ,  $\langle 100 \rangle$  or  $\langle 110 \rangle$ ), the surface  
 11 roughness of each selected orientation is optimized by optimizing  
 12 the deposition conditions for each orientation. In this way, a  
 13 maximum  $\Delta R/R$  can be achieved for each principal orientation  
 14 (i.e.,  $\langle 111 \rangle$ ,  $\langle 100 \rangle$  or  $\langle 110 \rangle$ ).

15  
 16 Since no  $\chi$  or  $\phi$  values are found in the literature for alloys,  $\chi$   
 17 values for the  $\langle 111 \rangle$ ,  $\langle 100 \rangle$ ,  $\langle 110 \rangle$  faces must be estimated.  
 18 First, equation (2) is used to calculate a  $\chi$  for a randomly  
 19 oriented alloy from the randomly oriented  $\chi$  values of the  
 20 constituent elements. Then, estimates are developed for  
 21 correlation factors between  $\chi$  values for randomly oriented FCC  
 22 elements ( $\chi_R$ ) and  $\chi$  values for FCC elements having a single  
 23 orientation ( $\chi_s$ ). For example, using data from Michaelson and  
 24 the relation  $\chi_R = (\chi_{111} + \chi_{100} + \chi_{110})/3$ , the following ratios were  
 25 derived in FCC Systems:

$$\chi_{111} = 1.027 \chi_R$$

$$\chi_{100} = 1.007 \chi_R$$

$$\chi_{110} = 0.965 \chi_R$$

1  
2 These ratios permit the estimation of  $\chi_s$  of FM layers or spacers  
3 having a single crystal orientation from the  $\chi_R$  of FM layers or  
4 spacers having a random crystal orientation, for the purpose of  
5 minimizing  $|\Delta\chi|$ .  
6

7 Although MR sensors have been reported wherein the FM layers and  
8 spacers have been selected to have the same crystallographic  
9 orientation, there has been no teaching of selecting an  
10 orientation of an FM layer or spacer based on its  $\chi$  to match a  $\chi$   
11 of another preferred orientation of FM layer or spacer. Of the  
12 reported MR sensors in which single crystallographic orientations  
13 for FM layers and spacers were used,  $|\Delta\chi|$  values were calculated  
14 using the teachings of the inventor. The lowest  $|\Delta\chi|$  thus  
15 calculated was for a Co/Cu FCC System, wherein the  $|\Delta\chi|$  was  
16 approximately 0.14 eV.  
17

18 An additional aspect of the invention is shown in Figs. 12 and  
19 13, which illustrate a spin valve sensor 10A and a GMR sensor 20A  
20 respectively comprised of compound FM layers. The spin valve  
21 sensor 10A (Fig. 12) includes two or more compound FM layers  
22 (FM1/FM2) and (FM3/FM4), each of which are composed of different  
23 ferromagnetic materials. Similarly, the GMR sensor 20A (Fig. 13)  
24 includes a plurality of electrically conductive spacers, such as  
25 Spacer 1 and Spacer 2, that are interposed between and compound  
26 FM layers, such as (FM1/FM2), (FM3/FM4), (FM4/FM5) and (FM6/FM7).  
27 As explained in example 3 previously, the FM materials for these  
28 compound layers should be selected so that the values of  $\lambda_s$  and  
29  $H_c$  for each material (e.g. FM1 and FM2) will combine to produce  
30 low values of  $\lambda_s$  and  $H_c$  for the layers (e.g. FM1/FM2). Further,

1 the interfaces between the FM layers and spacers (e.g. FM2/Spacer  
2 and FM3/Spacer) follow the electronegativity matching and other  
3 selection criteria described herein.

4  
5 In addition, the use of compound FM layers enables the adjustment  
6 of the overall  $\lambda_s$  for the spin valve sensor 10A and the GMR  
7 sensor 20A. For the structures of Fig. 12 (spin valve) and Fig.  
8 13 (GMR), FM1 and FM4 may be identical compositions, or may be  
9 different compositions, and the same applies to FM2 and FM3. It  
10 may be advantageous, however, that FM2 and FM3 have the same  
11 composition and that FM1 and FM4 have the same composition in  
12 order to simplify processing because fewer sputtering targets  
13 would be needed.

14  
15 The basis for having two or more different compositions for FM1  
16 and FM2 is that the magnetostriction thickness product of FM1 and  
17 FM2 may be selected so that  $\lambda_{FM1}t_{FM1}$  is approximately equal to -  
18  $\lambda_{FM2}t_{FM2}$ , where  $t$  is FM layer thickness, resulting in minimizing an  
19 average  $\lambda_s$  for both layers, which average  $\lambda_s$  desirably approaches  
20 zero for the compound FM interfaces. It is not necessary to  
21 absolutely match the magnetostriction thicknesses products in  
22 order to minimize magnetostriction. For example, if the ratio of  
23 magnetostriction thickness products is even in the range of .3 to  
24 3, the overall  $\lambda_s$  of the compound FM layer FM1/FM2 will be  
25 reduced. Even an unbalanced thickness product of each layer will  
26 lower  $\lambda_s$ , which minimizes  $\lambda_s$  of a compound FM layer structure.

27  
28 As previously noted, the use of compound FM layer also enables  
29 the minimization of the overall  $H_c$  of the layers because the  $H_c$   
30 of the layer is generally the average of the  $H_c$  values for each

1 FM material forming the layer (i.e., FM1 and FM2). For example,  
2 an FM2 selected for a good  $\chi$  match with the spacer may have a  
3 high  $H_c$ . This adverse effect can be mitigated by selecting an  
4 material for FM1 that has a very low  $H_c$ , without regard to  
5 matching its  $\chi$  with that of the spacer. Thus a low  $H_c$  for the  
6 compound FM layers, such as less than 10 oersteds, may be  
7 obtained.

8  
9 It is important, however, that the  $\chi$  of the FM layer adjacent to  
10 the spacers (e.g., FM2 or FM3) be minimized relative to the  $\chi$  of  
11 the adjacent spacer. Similar conditions apply to the GMR  
12 structure of Fig. 13 as well.

13  
14 Thus, the compound FM structure in spin valve structures and GMR  
15 structures, in combination with the preceding teaching requiring  
16 the minimization of  $\Delta\chi$  between FM and spacer, allows for  
17 maximizing  $\Delta R/R$  while simultaneously maximizing corrosion  
18 resistance and minimizing the  $\lambda_s$  and  $H_c$  of compound ferromagnet  
19 structures of spin valve structures or GMR structures or GMR  
20 structures.

#### 21 22 EXAMPLE 30

23 Heusler alloys represent another class of ferromagnetic materials  
24 possessing a superlattice structure that may be partially or  
25 fully ordered. Full ordering is possible at or very near to the  
26 general stoichiometric composition  $M_2MnM_1$  and may contain  
27 ferromagnetic elements Co and Ni as well as the nonferromagnetic  
28 elements Cu, Ir, Pd, Pt and Au for  $M_2$ .  $M_1$  may be Al, Ga, Ge, As,  
29 In, Si, Sn or Bi. The Heusler alloys containing only Pt, Au, Pd  
30 or Ir for  $M_2$  (i.e.,  $M_2$  having a full complement of such element,

e.g., Au<sub>2</sub>), exhibit Curie temperatures below room temperatures (i.e., below 300°K). Accordingly such alloys may, if they are not ferromagnetic and their bulk resistivity is less than approximately 30  $\mu\Omega$ -cm, be used as spacers for other ferromagnetic Heusler alloys. It is also possible to combine the following elements in M<sub>2</sub>: Cu, Co, Ni, Pd, Pt, Au and Ir, for the purpose of fine control of the electronegativity of the Heusler alloy to minimize  $\Delta\chi$  of the Heusler alloy and its spacer element or alloy or compound.

A representative series of FM Heusler alloys and their electronegativities is illustrated below:

<u>Heusler Alloy</u>	<u><math>\chi</math> Alloy</u>
Cu <sub>2</sub> MnAl	1.80
Ni <sub>2</sub> MnSn	1.93
Co <sub>2</sub> MnGe	1.94
Co <sub>2</sub> MnSi	1.93
Co <sub>2</sub> MnSn	1.89
CuPdMnSn	1.92
NiAuMnSn	1.95

The FM Heusler alloys may be used in conjunction with spacer materials such as Cu, CuAu alloys (with Au of 5 to 15 atomic percent) and intermetallic spacers Al<sub>2</sub>Au (with  $\chi$  equal to 1.88) and PtAl<sub>2</sub> (with  $\chi$  equal to 1.92). AgAu alloys may be used as well with Au less than 25 atomic percent.

By virtue of this invention, a method and means are provided for selecting the materials for spin valve and GMR sensors which simultaneously may have higher magnetoresistance output, improved corrosion resistance, improved coercivity, improved thermal

1 stability of the interfaces and improved electromigration  
2 properties. By virtue of this invention, a method and means are  
3 provided for selecting the materials for spin valve and GMR  
4 sensors which simultaneously may have higher magnetoresistance  
5 output, improved corrosion resistance, improved coercivity,  
6 improved thermal stability of the interfaces and improved  
7 electromigration properties.

CLAIMS

What is claimed is:

1. A method of making a magnetoresistive sensor formed with an electrically conductive spacer interposed between a first and a second ferromagnetic layer, comprising the steps of:

selecting a first material having a first electronegativity for said first ferromagnetic layer;

selecting a second material having a second electronegativity for said electrically conductive spacer; and

selecting a third material having a third electronegativity for said second ferromagnetic layer;

wherein an absolute value of a difference between said first and second electronegativities is minimized.

2. The method as in Claim 1, wherein said first and third electronegativities are approximately equal.

3. The method as in Claim 1, wherein said first material substantially comprises a superlattice.

4. The method as in Claim 3, wherein said second material substantially comprises a superlattice.

1 5. The method as in Claim 1, wherein said second material  
2 substantially comprises a superlattice.

3  
4 6. The method as in Claim 1, wherein said first material and  
5 said second material comprise substantially the same crystal  
6 structure.

7  
8 7. The method as in Claim 6, wherein said first material  
9 comprises a first face centered cubic material and said second  
10 material comprises a second face centered cubic material.

11  
12 8. The method as in Claim 7 wherein said absolute value is  
13 less than approximately 0.12 eV.

14  
15 9. The method as in Claim 7, wherein said step of selecting  
16 said second material includes the step of selecting said material  
17 from the group consisting of Cu, Ag, Al, Au, Ir, Pt, Pd, Rh, and  
18 binary, ternary and higher order alloys of said elements.

19  
20 10. The method of Claim 7, wherein said step of selecting said  
21 second material includes the step of selecting said material from  
22 a group consisting of  $\text{Ag}_3\text{Pt}$ ,  $\text{AgPt}_3$ ,  $\text{Cu}_3\text{Pt}$ ,  $\text{CuPt}$ ,  $\text{CuPt}_3$ ,  $\text{Cu}_3\text{Pt}_5$ ,  
23  $\text{Cu}_3\text{Au}$ ,  $\text{Cu}_3\text{Pd}$ ,  $\text{CuPd}$ ,  $\text{CrIr}_3$ ,  $\text{Cr}_2\text{Pt}$  and mixtures of said materials.

24



1 11. The method as in Claim 7, wherein said step of selecting  
 2 said first material includes the step of selecting materials  
 3 from the group comprising 80Ni:20Fe, Ni<sub>3</sub>Fe, Ni<sub>3</sub>Mn, Fe<sub>4</sub>Mn, FePd,  
 4 Fe<sub>1-y</sub> Au<sub>y</sub>, where y is an atomic fraction with a value between 0.30  
 5 and 0.70, Co<sub>1-z</sub> Au<sub>z</sub>, where z is an atomic fraction with a value  
 6 between 0.10 and 0.50, 90Co:10Fe, Fe<sub>0.485</sub> Ni<sub>0.418</sub> Mn<sub>0.097</sub>,  
 7 (48Co:29Ni:23Fe)<sub>(1-y)</sub>Pd<sub>y</sub>, (26Co:44Ni:30Fe)<sub>(1-y)</sub>Pd<sub>y</sub>, where y is an  
 8 atomic fraction of Pd with a value between 0.12 to 0.30,  
 9 33.6Co:20.3Ni:16.1Fe:30Pd, and 18.2Co:30.8Ni:21Fe:30Pd.

10  
 11 12. The method as in Claim 7, wherein said first material  
 12 comprises a first body centered cubic material and said second  
 13 material comprises a second body centered cubic material.  
 14

15 13. The method as in Claim 12 wherein said absolute value is  
 16 less than approximately 0.07 eV.  
 17

18 14. The method as in Claim 12, wherein said step of selecting  
 19 said second material includes the step of selecting said material  
 20 from a group consisting of Cr, W, V, Nb, Mo, Ta and binary,  
 21 ternary and higher order alloys of said elements.  
 22

23 15. The method as in Claim 12, wherein said step of selecting  
 24 said first material includes the step of selecting ferromagnetic

1 materials from the group comprising  $\text{Fe}_{1-u} \text{Cr}_u$ , where  $u$  is an  
2 atomic fraction with a value between 0.40 and 0.70,  $\text{Fe}_{1-w} \text{V}_w$ ,  
3 where  $w$  is an atomic fraction with a value between 0.25 and 0.35,  
4 ternary alloys of Fe, Cr and V, and  $\text{Fe}_3\text{Al}$ .

5  
6 16. The method as in Claim 1, wherein said steps of selecting  
7 said first material and said second material each includes a step  
8 of defining said first and second electronegativities according  
9 to the following equations:

10  
11  
12 
$$\chi(\text{FM}) = 0.44 \phi(\text{FM}) - 0.15, \text{ and}$$

13 
$$\chi(\text{spacer}) = 0.44 \phi(\text{spacer}) - 0.15,$$

14 where  $\chi(\text{FM})$  and  $\chi(\text{spacer})$  are said first and second  
15 electronegativities, respectively, and  $\phi(\text{FM})$  and  $\phi(\text{spacer})$  are  
16 work functions of said ferromagnetic layer and said electrically  
17 conductive spacer, respectively.

18  
19 17. The method as in Claim 16, wherein said step of selecting  
20 said second material includes the step of selecting a conductive  
21 alloy having an electronegativity  $\chi_A$  formed of a plurality of  
22 elements 1 through  $i$ ;

wherein said elements have electronegativities  $\chi_1$  through  $\chi_i$ ,  
and atomic fractions  $f_1$  and  $f_i$ , respectively; and  
wherein said  $\chi_A$  is defined by the following equation:

$$\chi_A = \chi_1 f_1 + \chi_2 f_2 \dots + \chi_i f_i .$$

18. The method as in Claim 16, wherein said step of selecting  
said first material includes the step of selecting a  
ferromagnetic alloy having an electronegativity  $\chi_B$  and formed of  
a plurality of elements 1 through j;

wherein said elements have electronegativities  $\chi_1$  through  $\chi_j$ ,  
and atomic fractions  $f_1$  and  $f_j$ , respectively; and  
wherein said  $\chi_B$  is defined by the following equation:

$$\chi_B = \chi_1 f_1 + \chi_2 f_2 \dots \chi_j f_j$$

19. The method as in Claim 1, wherein said step of selecting  
said first material includes the step of selecting a first  
Heusler alloy.

20. The method as in Claim 19, wherein said first Heusler alloy has a composition of  $M_1MnM_2$ , where  $M_1$  is an element selected from the group consisting of Al, Ga, Ge, As, In, Si, Sn and Bi, and  $M_2$  is an element selected from the group consisting of Co, Ni, Cu, Ir, Pd, Pt and Au.

21. The method as in Claim 20, wherein said step of selecting said second material includes a step of selecting a second Heusler alloy that is nonferromagnetic and wherein  $M_2$  is an element selected from the group consisting of Pt, Au, Pd and Ir, said second Heusler alloy having a bulk resistivity of less than approximately  $30 \mu\Omega\text{-cm}$ .

22. The method as in Claim 20, wherein said step of selecting said second material includes a step of selecting a material from the group consisting of Cu,  $Cu_{1-x}Au_x$ , where  $x$  is an atomic fraction between .05 and .15,  $Al_2Au$ ,  $PtAl_2$  and  $Ag_{1-y}Au_y$ , where  $y$  is an atomic fraction less than .25.

23. The method as in Claim 1, wherein said first material comprises a material having a bulk resistivity of less than approximately  $100 \mu\Omega\text{-cm}$ .

1  
2 24. The method as in Claim 22, wherein said third material  
3 comprises a material having a bulk resistivity of less than  
4 approximately 100  $\mu\Omega$ -cm.  
5

6 25. The method as in Claim 1, wherein said second material  
7 comprises a material having a bulk resistivity of less than  
8 approximately 30  $\mu\Omega$ -cm.  
9

10 26. A method of optimizing the interfacial properties of a  
11 magnetoresistive sensor comprising the steps of:  
12 selecting at least one electrically conductive spacer having a  
13 first work function ( $\phi$  spacer); and  
14 selecting ferromagnetic layers having at least a second work  
15 function ( $\phi$  FM);  
16 wherein an absolute value of a difference between said first  
17 and second work functions is minimized.  
18

19 27. A magnetoresistive sensor comprising:  
20 first and second ferromagnetic layers, said first  
21 ferromagnetic layer comprising a first material having a first  
22 electronegativity; and

1 an electrically conducting spacer interposed between said  
2 ferromagnetic layers, and comprising a second material having a  
3 second electronegativity;

4 wherein an absolute value of a difference between said first  
5 and second electronegativities is minimized.  
6  
7

8 28. The sensor as in Claim 27, wherein said second  
9 ferromagnetic comprises a third material having a third  
10 electronegativity and said first and third electronegativities  
11 are approximately equal.  
12

13 29. The sensor as in Claim 27, wherein said first material  
14 substantially comprises a superlattice.  
15

16 30. The sensor as in Claim 29, wherein said second material  
17 substantially comprises a superlattice.  
18

19 31. The sensor as in Claim 27, wherein said second material  
20 substantially comprises a superlattice.  
21

22 32. The sensor as in Claim 27, wherein said first material and  
23 said second material comprise substantially the same crystal  
24 structure.

1

2 33. The sensor as in Claim 32, wherein said first material  
3 comprises a first face centered cubic material and said second  
4 material comprises a second face centered cubic material.

5

6 34. The sensor as in Claim 33, wherein said absolute value is  
7 less than approximately 0.12 eV.

8

9 35. The sensor as in Claim 33, wherein said second material is  
10 selected from the group comprising Cu, Ag, Al, Au, Ir, Pt, Pd,  
11 Rh, and binary, ternary and higher order alloys of said elements.

12

13 36. The sensor as in Claim 33, wherein said second material is  
14 selected from the group comprising  $\text{Ag}_3\text{Pt}$ ,  $\text{AgPt}_3$ ,  $\text{Cu}_3\text{Pt}$ ,  $\text{CuPt}$ ,  
15  $\text{CuPt}_3$ ,  $\text{Cu}_3\text{Pt}_5$ ,  $\text{Cu}_3\text{Au}$ ,  $\text{Cu}_3\text{Pd}$ ,  $\text{CuPd}$ ,  $\text{CrIr}_3$ ,  $\text{Cr}_2\text{Pt}$  and mixtures of  
16 said materials.

17

18 37. The sensor as in Claim 33, wherein said first material is  
19 selected from the group comprising 80Ni:20Fe,  $\text{Ni}_3\text{Fe}$ ,  $\text{Ni}_3\text{Mn}$ ,  $\text{Fe}_4\text{Mn}$ ,  
20  $\text{FePd}$ ,  $\text{Fe}_{1-y}\text{Au}_y$ , where y is an atomic fraction with a value  
21 between 0.30 and 0.70,  $\text{Co}_{1-z}\text{Au}_z$ , where z is an atomic fraction  
22 with a value between 0.10 and 0.50, 90Co:10Fe,  $\text{Fe}_{0.485}\text{Ni}_{0.418}$   
23  $\text{Mn}_{0.097}$ ,  $(48\text{Co}:29\text{Ni}:23\text{Fe})_{(1-y)}\text{Pd}_y$ ,  $(26\text{Co}:44\text{Ni}:30\text{Fe})_{(1-y)}\text{Pd}_y$ , where y is

1 an atomic fraction of Pd with a value between 0.12 to 0.30,  
2 33.6Co:20.3Ni:16.1Fe:30Pd, and 18.2Co:30.8Ni:21Fe:30Pd.

3  
4 38. The sensor as in Claim 32, wherein said first material  
5 comprises a first body centered cubic material and said second  
6 material comprises a second body centered cubic material.

7  
8 39. The sensor as in Claim 36, wherein said absolute value is  
9 less than approximately 0.07 eV.

10  
11 40. The sensor as in Claim 38, wherein said second material is  
12 selected from a group consisting of Cr, W, V, Nb, Mo, Ta and  
13 binary ternary and higher order alloys of said elements.

14  
15 41. The sensor as in Claim 38, wherein said first material is  
16 selected from the group comprising  $Fe_{1-u}Cr_u$ , where u is the  
17 atomic fraction with a value between 0.40 and 0.70,  $Fe_{1-w}V_w$ ,  
18 where w is the atomic fraction with a value between 0.25 and  
19 0.35, ternary alloys of Fe, Cr and V, and  $Fe_3Al$ .

20  
21 42. The sensor as in Claim 27, wherein said first  
22 electronegativity corresponds to a first work function;  
23 wherein said second electronegativity corresponds to a second  
24 work function; and



1 wherein said at least first and second work functions are  
2 matched for optimizing the interfacial properties of the data  
3 storage device.

4  
5 43. The sensor as in Claim 27, wherein said first and second  
6 electronegativities are defined according to the following  
7 equations, respectively:

$$\chi \text{ (FM)} = 0.44 \phi \text{ (FM)} - 0.15, \text{ and}$$

$$\chi \text{ (spacer)} = 0.44 \phi \text{ (spacer)} - 0.15,$$

10 where  $\chi \text{ (FM)}$  and  $\chi \text{ (spacer)}$  are said first and second  
11 electronegativities, respectively, and  $\phi \text{ (FM)}$  and  $\phi \text{ (spacer)}$  are  
12 the work functions of said ferromagnetic layer, and said  
13 electrically conductive spacer, respectively.

14  
15 44. The sensor as in Claim 43, wherein said second material  
16 comprises a conductive alloy having an electronegativity  $\chi_A$  and  
17 formed of a plurality of elements 1 through i;

18 wherein said elements have electronegativities  $\chi_1$  through  $\chi_i$ ,  
19 and atomic fractions  $f_1$  through  $f_i$ , respectively; and

20 wherein said  $\chi_A$  is defined by the following equation:

$$\chi_A = \chi_1 f_1 + \chi_2 f_2 \dots \chi_i f_i$$

45. The sensor as in Claim 43, wherein said first material comprises ferromagnetic alloy having an electronegativity  $\chi_B$  and formed of a plurality of elements 1 through j;

wherein said elements have electronegativities  $\chi_1$  through  $\chi_j$ , and atomic fractions  $f_1$  and  $f_j$ , respectively; and

wherein said  $\chi_B$  is defined by the following equation:

$$\chi_B = \chi_1 f_1 + \chi_2 f_2 \dots \chi_j f_j$$

46. The sensor as in Claim 27, wherein said first material comprises a material having a bulk resistivity of less than approximately 100  $\mu\Omega$ -cm.

47. The sensor as in Claim 46, wherein said third material comprises a material having a bulk resistivity of less than approximately 100  $\mu\Omega$ -cm.

48. The sensor as in Claim 27, wherein said second material comprises a material having a bulk resistivity of less than approximately 30  $\mu\Omega$ -cm.

49. The sensor as in Claim 27, wherein said first material is a first Heusler alloy.

1  
2 50. The sensor as in Claim 49, wherein said first Heusler alloy  
3 has a composition of  $M_1MnM_2$ , where  $M_1$  is an element selected from  
4 the group consisting of Al, Ga, Ge, As, In, Si, Sn and Bi, and  $M_2$   
5 is an element selected from the group consisting of Co, Ni, Cu,  
6 Ir, Pd, Pt and Au.

7  
8 51. The sensor as in Claim 50, wherein said second material  
9 comprises a second Heusler alloy that is nonferromagnetic and  
10 wherein  $M_2$  is an element selected from the group consisting of  
11 Pt, Au, Pd and Ir, said second Heusler alloy having a bulk  
12 resistivity of less than approximately  $30 \mu\Omega\text{-cm}$ .

13  
14 52. The sensor as in Claim 27, wherein said second material  
15 comprises a material from the group consisting of Cu,  $Cu_{1-x}Au_x$ ,  
16 where x is an atomic fraction between .05 and .15,  $Al_2Au$ ,  $PtAl_2$   
17 and  $Ag_{1-y}Au_y$ , where y is an atomic fraction less than .25.

18  
19 53. A method of optimizing the interfacial properties of a  
20 magnetoresistive sensor comprising the steps of:

21 selecting a substrate having a predetermined crystallographic  
22 orientation;

1 selecting ferromagnetic layers, each having a crystallographic  
2 orientation similar to said substrate crystallographic structure  
3 and having a first electronegativity; and

4 selecting at least one electrically conductive spacer having a  
5 crystallographic orientation similar to said ferromagnetic  
6 crystallographic structure and having a second electronegativity;

7 wherein an absolute value of a difference between said first  
8 and second electronegativities is minimized.

9  
10 54. The method as in Claim 53, wherein, each of said selecting  
11 steps includes selecting a single crystal material for said  
12 substrate, said ferromagnetic layers and said electrically  
13 conductive spacer.

14  
15 55. The method as in Claim 53, wherein said step of selecting  
16 said substrate includes selecting a substrate material with a  
17 face centered cubic structure;

18 wherein said step of selecting said ferromagnetic layers  
19 includes selecting a ferromagnetic layer material with a face  
20 centered cubic structure; and

21 wherein said step of selecting said conductive spacer includes  
22 selecting a spacer material with a face centered cubic structure.

1 56. The method as in Claim 55, wherein said absolute value is  
2 less than approximately 0.14 eV.

3  
4 57. The method as in Claim 53, wherein said step of selecting  
5 said substrate includes selecting a substrate material with a  
6 body centered cubic structure;

7 wherein said step of selecting said ferromagnetic layers  
8 includes selecting a ferromagnetic layer material with a body  
9 centered cubic structure; and

10 wherein said step of selecting said conductive spacer includes  
11 selecting a spacer material with a body centered cubic structure.

12  
13 58. A method of optimizing the interfacial properties of a  
14 magnetoresistive sensor comprising the steps of:

15 selecting a substrate having a random crystallographic  
16 orientation;

17 selecting ferromagnetic layers, each having a random  
18 crystallographic orientation and having a first  
19 electronegativity; and

20 selecting an electrically conductive spacer having a random  
21 crystallographic orientation and having a second  
22 electronegativity;

1 wherein said selecting steps provide for minimizing an  
2 absolute value of a difference between said first  
3 electronegativity and said second electronegativity.  
4

5 59. The method as in Claim 58, wherein said step of selecting  
6 said substrate includes selecting a substrate material with a  
7 face centered cubic structure;

8 wherein said step of selecting said ferromagnetic layers  
9 includes selecting a ferromagnetic layer material with a face  
10 centered cubic structure; and

11 wherein said step of selecting said conductive spacer includes  
12 selecting a spacer material with a face centered cubic structure.  
13

14 60. The method as in Claim 59, wherein said absolute value is  
15 less than approximately 0.12 eV.  
16

17 61. The method as in Claim 59, wherein said step of selecting  
18 said substrate includes selecting a substrate material with a  
19 body centered cubic structure;

20 wherein said step of selecting said ferromagnetic layers  
21 includes selecting a ferromagnetic layer material with a body  
22 centered cubic structure; and

23 wherein said step of selecting said conductive spacer includes  
24 selecting a spacer material with a body centered cubic structure.

1  
2 62. The method as in Claim 61, wherein said absolute value is  
3 less than approximately 0.07 eV.  
4

5 63. A method of optimizing the interfacial properties of a  
6 magnetoresistive sensor comprising the steps of:  
7 selecting a substrate having a predetermined crystallographic  
8 orientation;  
9 selecting ferromagnetic layers, each having a crystallographic  
10 orientation substantially similar to said substrate  
11 crystallographic orientation and having a first work function;  
12 and  
13 selecting at least one electrically conductive spacer having a  
14 crystallographic orientation similar to said substrate  
15 crystallographic orientation and having a second work function;  
16 wherein said selecting steps include the step of substantially  
17 minimizing a difference between said first and second work  
18 functions.  
19

20 64. A method of optimizing the interfacial properties of a  
21 magnetoresistive sensor comprising the steps of:  
22 selecting a substrate having a random crystallographic  
23 orientation;

1 selecting ferromagnetic layers, each having a random  
2 crystallographic orientation and having a first work function;  
3 and

4 selecting an electrically conductive spacer having a random  
5 crystallographic orientation and having a second work function;

6 wherein said selecting steps include minimizing a difference  
7 between said first and second work functions.  
8

9 65. A magnetoresistive sensor comprising:

10 a substrate having a predetermined crystallographic  
11 orientation;

12 ferromagnetic layers, each having a crystallographic  
13 orientation similar to said substrate crystallographic  
14 orientation and having a first electronegativity; and

15 at least one electrically conductive spacer interposed between  
16 said ferromagnetic layers and having a crystallographic  
17 orientation similar to said substrate crystallographic  
18 orientation and having a second electronegativity;

19 wherein an absolute difference between said first and second  
20 electronegativities is minimized for optimizing the interfacial  
21 properties of the sensor.  
22



1 66. The sensor as in Claim 65, wherein said ferromagnetic  
2 layers comprise single crystal structures and said electrically  
3 conductive spacer comprises a single crystal.

4  
5 67. The sensor as in Claim 65, wherein said substrate comprises  
6 a material having a face centered cubic structure;  
7 wherein said ferromagnetic layers comprise materials having  
8 face centered cubic structures; and  
9 wherein said conductive spacer comprises a material having a  
10 face centered cubic structure.

11  
12 68. The sensor as in Claim 67, wherein said absolute value is  
13 less than approximately 0.14 eV.

14  
15 69. The sensor as in Claim 65, wherein said substrate comprises  
16 a material having a body centered cubic structure;  
17 wherein said ferromagnetic layers comprise materials having a  
18 body centered cubic structure; and  
19 wherein said conductive spacer comprises material having a  
20 body centered cubic structure.

21  
22 70. A magnetoresistive sensor comprising:  
23 a substrate having a random crystallographic orientation;

1 ferromagnetic layers, each having a random crystallographic  
2 orientation and having a first electronegativity; and  
3 an electrically conductive spacer interposed between said  
4 ferromagnetic layers and having a random crystallographic  
5 orientation and having a second electronegativity;  
6 wherein an absolute difference between said first and second  
7 electronegativities is minimized for optimizing the interfacial  
8 properties of the sensor.  
9

10 71. The sensor as in Claim 70, wherein said substrate comprises  
11 a material having a face centered cubic structure;

12 wherein said ferromagnetic layers comprise materials having  
13 face centered cubic structures; and

14 wherein said conductive spacer comprises a material having a  
15 face centered cubic structure.  
16

17 72. The sensor as in Claim 71, wherein said absolute value is  
18 less than approximately 0.12 eV.  
19

20 73. The sensor as in Claim 70, wherein said substrate comprises  
21 a material having a body centered cubic structure;

22 wherein said ferromagnetic layers comprise materials having a  
23 body centered cubic structure; and

wherein said conductive spacer comprises material having a body centered cubic structure.

74. The sensor as in Claim 73, wherein said absolute value is less than approximately 0.07 eV.

75. The magnetoresistive sensor as in Claim 70, wherein said ferromagnetic layers each comprise crystals having three faces: 111, 110 and 100, having individual electronegativities  $\chi_{111}$ ,  $\chi_{100}$ , and  $\chi_{110}$ , respectively; and

wherein said first electronegativity is defined by the following equation:

$$\chi(\text{average}) = 1/3 (\chi_{111} + \chi_{100} + \chi_{110}).$$

76. The sensor as in Claim 70, wherein said electrically conductive spacer comprises crystals having three faces: 111, 110 and 100, having individual electronegativities  $\chi_{111}$ ,  $\chi_{100}$ , and  $\chi_{110}$ , respectively; and

wherein said second electronegativity is defined by the following equation:

$$\chi(\text{average}) = 1/3 (\chi_{111} + \chi_{100} + \chi_{110}).$$

77. The sensor as in Claim 27, further comprising:

1 a substrate in atomic contact with a side of one of said  
2 ferromagnetic layers opposite said spacer; and  
3 an antiferromagnetic layer in atomic contact with a side of  
4 another one of said ferromagnetic layers opposite said spacer;  
5 wherein the sensor is a spin valve sensor.  
6

7 78. The sensor as in Claim 77 further comprising a buffer layer  
8 interposed between one of said ferromagnetic layers and said  
9 substrate.  
10

11 79. The sensor in Claim 78, wherein said buffer layer is an  
12 element selected from a group consisting of Ta, Cr, Fe, Pt, Pd,  
13 Ir and Au.  
14

15 80. The sensor as in Claim 27, further comprising:

16 a substrate in atomic contact with a side of one of said  
17 ferromagnetic layers opposite said spacer;  
18 wherein the sensor is a giant magnetoresistive sensor, and  
19 said first and second ferromagnetic layers comprise a plurality  
20 of said first and second ferromagnetic layers and said  
21 electrically conductive spacer comprises a plurality of said  
22 spacers.  
23

1 81. The sensor as in Claim 80 further comprising a buffer layer  
2 interposed between one of said ferromagnetic layers and said  
3 substrate.  
4

5 82. The sensor as in Claim 81, wherein said buffer layer is an  
6 element selected from a group consisting of Ta, Cr, Fe, Pt, Pd,  
7 Ir and Au.  
8

9 83. A magnetoresistive sensor comprising in combination:  
10 a substrate;

11 ferromagnetic layer means formed over said substrate and  
12 having a first electronegativity; and

13 electrically conductive spacer means formed on said  
14 ferromagnetic layer and having a second electronegativity;

15 wherein a magnetoresistive response characteristic ( $\Delta R/R$ ) of  
16 the sensor is optimized by correlating said first and second  
17 electronegativities to  $\Delta R/R$  by the following equation:

18 
$$\Delta R/R \cong A - B |\Delta\chi|^n,$$

19 where A and B are constant values and  $|\Delta\chi|$  is an absolute value  
20 of the difference between said first and second  
21 electronegativities.  
22

1 84. The sensor as in Claim 83, wherein said ferromagnetic layer  
2 means constitutes a plurality of ferromagnetic layers; and said  
3 conductive spacer means comprises a number of spacer layers  
4 interposed between said ferromagnetic layers; and  
5 wherein said absolute value is minimized.

6  
7 85. The sensor as in Claim 84, wherein said substrate comprises  
8 a material having a face centered cubic structure;

9 wherein said ferromagnetic layers comprise materials having  
10 face centered cubic structures; and

11 wherein said conductive spacer comprises a material having a  
12 face centered cubic structure.

13  
14 86. The sensor as in Claim 85, wherein said absolute value is  
15 less than 0.12 eV.

16  
17 87. A method of optimizing the magnetoresistive response  
18 ( $\Delta R/R$ ) of a magnetoresistive sensor, comprising the steps of:

19 selecting ferromagnetic layers having at least a first  
20 electronegativity;

21 selecting at least one electrically conductive spacer having  
22 at least a second electronegativity; and

1 wherein said selecting steps include correlating said first  
2 and second electronegativities for optimizing  $\Delta R/R$  in accordance  
3 with the following equation:

$$\Delta R/R \cong A - B |\Delta\chi|^4,$$

5 where A and B are constant values and  $|\Delta\chi|$  is an absolute value  
6 of the difference between said first and second  
7 electronegativities.

8  
9 88. The method according to Claim 87, wherein said step of  
10 correlating includes the step of optimizing  $\Delta R/R$  in view of the  
11 following relationship:

$$\Delta R/R \cong A - 2A |\Delta\chi|^4.$$

12  
13  
14 89. The method according to Claim 88, wherein the sensor  
15 includes a spin valve sensor, including the step of setting the  
16 constant value A equal to approximately 32.30.

17  
18 90. The method according to Claim 88, wherein the sensor  
19 includes a giant magnetoresistive sensor having a first peak,  
20 including the step of setting the constant value A equal to  
21 approximately 245 for said first peak.

1 91. The method according to Claim 88, wherein the sensor  
2 includes a giant magnetoresistive sensor having first and second  
3 peaks, including the step of setting the constant value A equal  
4 to approximately 110 for said second peak.

5  
6 92. The method according to Claim 88, wherein the sensor  
7 includes a giant magnetoresistive sensor having first, second and  
8 third peaks, including the step of setting the constant value A  
9 equal to approximately 45 for said third peak.

10  
11 93. A magnetoresistive sensor comprising:  
12 first and second ferromagnetic layers, wherein at least one of  
13 said layers comprise a superlattice material; and  
14 an electrically conductive spacer interposed between said  
15 ferromagnetic layers.

16  
17 94. The sensor of Claim 93, wherein said electrically  
18 conductive spacer comprises a superlattice material.

19  
20 95. The sensor of Claim 93, wherein said first ferromagnetic  
21 layer has a first electronegativity, said electrically conductive  
22 spacer has a second electronegativity and an absolute value of a  
23 difference between said first and second electronegativities is  
24 minimized.



1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23

96. A magnetoresistive sensor comprising:  
first and second ferromagnetic layers; and  
an electrically conductive spacer interposed between said  
ferromagnetic layers, wherein said spacer comprises a  
superlattice material.

97. The sensor of Claim 96, wherein at least one of said  
ferromagnetic layers comprises a superlattice material.

98. The sensor of Claim 96, wherein said first ferromagnetic  
layer has a first electronegativity, said electrically conductive  
spacer has a second electronegativity and an absolute value of a  
difference between said first and second electronegativities is  
minimized.

99. A magnetoresistive sensor comprising:  
a first and second ferromagnetic layer; and  
an electrically conductive spacer interposed between said  
ferromagnetic layers;  
wherein said first ferromagnetic layer comprises a first  
compound ferromagnetic layer having a first material with a first  
magnetostriction and a first thickness and a second ferromagnetic

1 material with a second magnetostriction and a second thickness;  
2 and

3 wherein a difference between a first product of said first  
4 thickness and said first magnetostriction and a second product of  
5 said second thickness and said second magnetostriction is  
6 minimized.

7  
8 100. The sensor as in Claim 99, wherein a ratio between said  
9 first and second products is in a range of approximately .3 to  
10 approximately 3.

11  
12 101. The sensor as in Claim 99, wherein said first and second  
13 materials have a first and second coercivity, respectfully, and  
14 an average of said first and second coercivities is minimized.

15  
16 102. The sensor as in Claim 101, wherein said average is less  
17 than approximately ten oersteds.

18  
19 103. The sensor as in Claim 99, wherein said first ferromagnetic  
20 material has a first electronegativity and is in atomic contact  
21 with said electrically conductive spacer, wherein said spacer has  
22 a second electronegativity and wherein an absolute value of a  
23 difference between said first and second electronegativities is  
24 minimized.

1  
2 104. The sensor as in Claim 99, wherein said second  
3 ferromagnetic layer comprises a second compound ferromagnetic  
4 layer having a third ferromagnetic material and a fourth  
5 ferromagnetic material in atomic contact with said electrically  
6 conductive spacer, and wherein said first and fourth  
7 ferromagnetic materials comprise substantially the same  
8 composition and said second and third ferromagnetic materials  
9 comprise substantially the same composition.

ABSTRACT OF THE DISCLOSURE

A method for maximizing the interfacial properties of magnetoresistive sensors, such as spin valve and GMR sensors used in storage devices, comprises selecting the materials for ferromagnetic layers and for electrically conductive spacers that are interposed between the ferromagnetic layers. The electronegativities of the selected materials are substantially matched so that an absolute value of the differences in electronegativities is minimized. The conductive spacer material provides a relatively low resistivity and a large mean free path. The sensors experience greater chemical and thermal stability, are corrosion resistant, and realize an increased signal output.

## APPENDIX A

A list of  $\chi$  values for elements that may be used as ferromagnetic layers and conductive spacers is provided below:

	<u>Element</u>	<u>Polycrystalline <math>\chi</math> (eV).</u>	<u>Bulk Crystal Structure</u>
6	Au	2.22	FCC
7	Fe	1.90	BCC
8	Cu	1.91	FCC
9	Ag	1.89	FCC
10	Pt	2.34	FCC
11	Pd	2.32	FCC
12	Ir	2.32	FCC
13	Rh	2.04	FCC
14	Co	2.05	FCC in thin films
15	Ni	2.13	FCC
16	Mn	1.65	Complex
17	Cr	1.83	BCC
18	Ti	1.76	
19	V	1.74	BCC
20	Ru	1.92	CPH close packed hexagonal
21	Sn	1.79	Complex
22	Ta	1.73	BCC
23	Nb	1.75	BCC

1	Zr	1.63	BCC CPH
2	Hf	1.57	CPH
3	Y	1.21	CPH
4	La	1.39	FCC CPH
5	<u>Element Polycrystalline <math>\chi</math> (eV.)</u>		<u>Bulk Crystal Structure</u>
6			
7	Rare earth		
8	elements	~1.21	Complex CPH FCC BCC
9	C	~2.52	Various forms
10	N	~3.01	Gaseous
11	Al	~1.72	FCC
12	Ge	~2.00	
13	Si	~1.96	
14	Bi	1.71	
15	As	1.50	

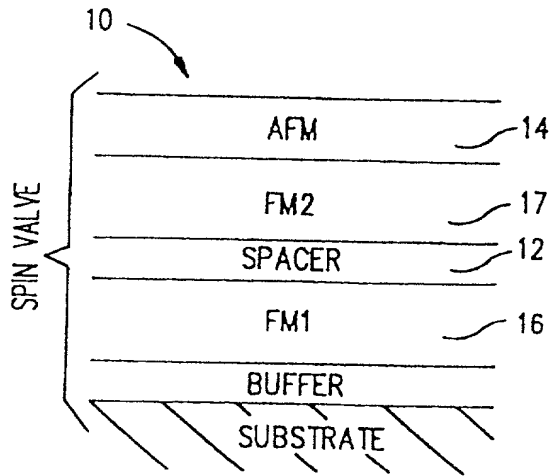


FIG. 1

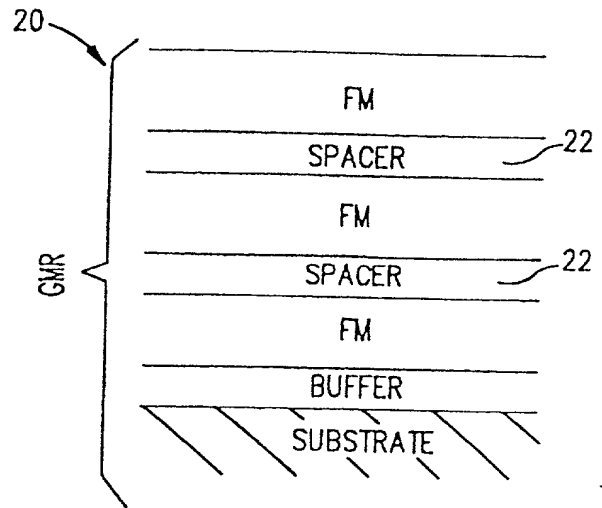


FIG. 2

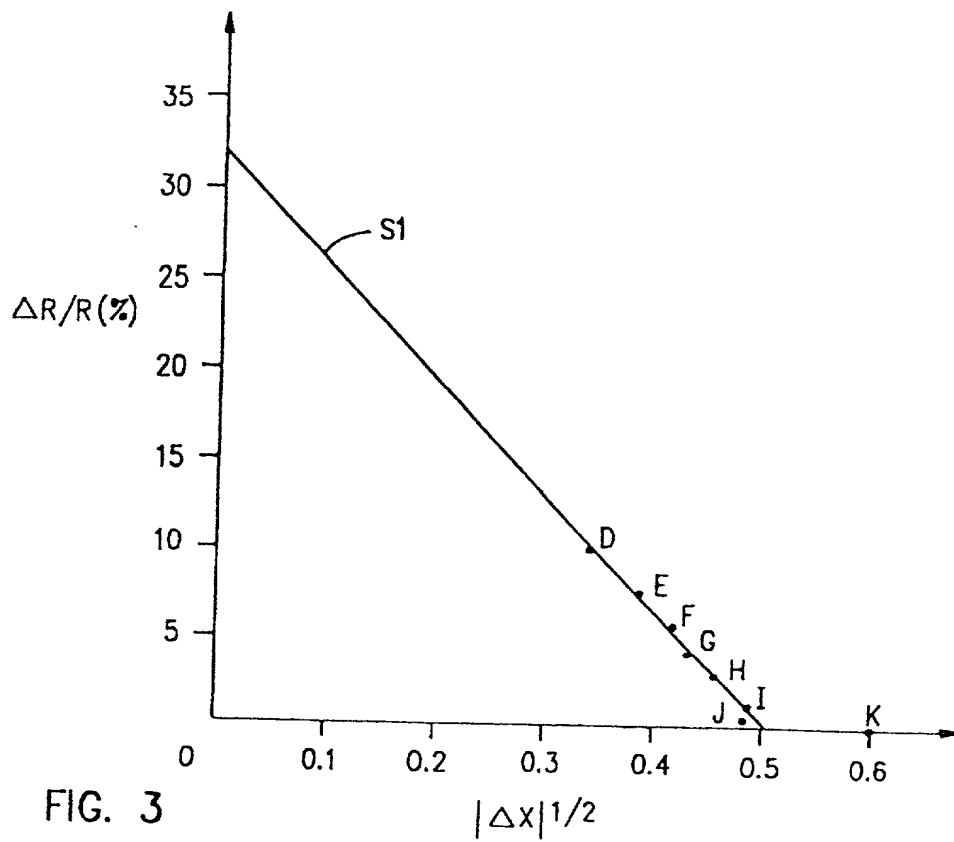
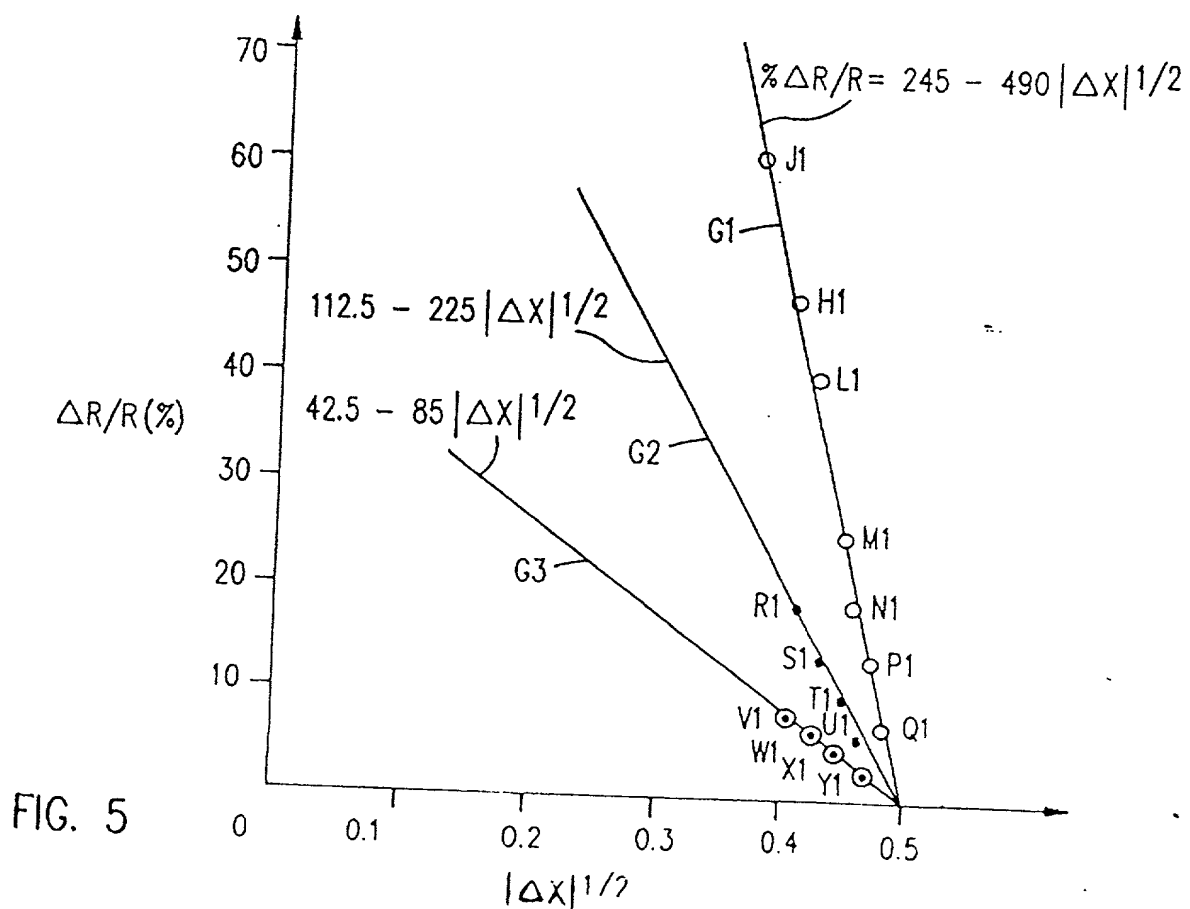
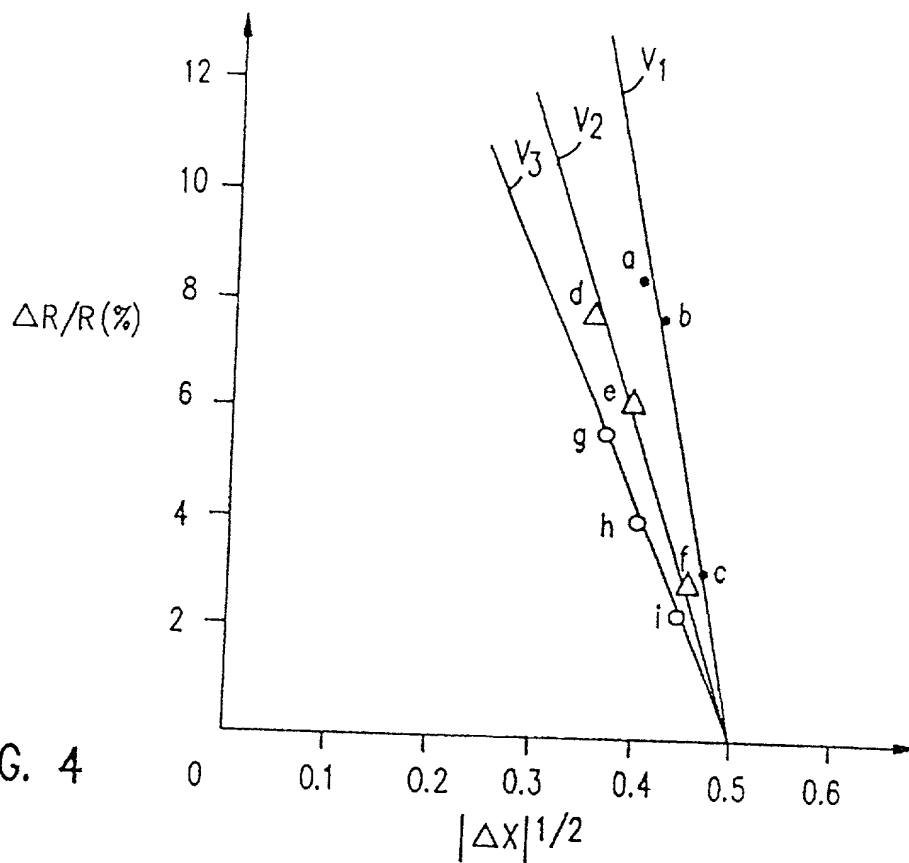


FIG. 3





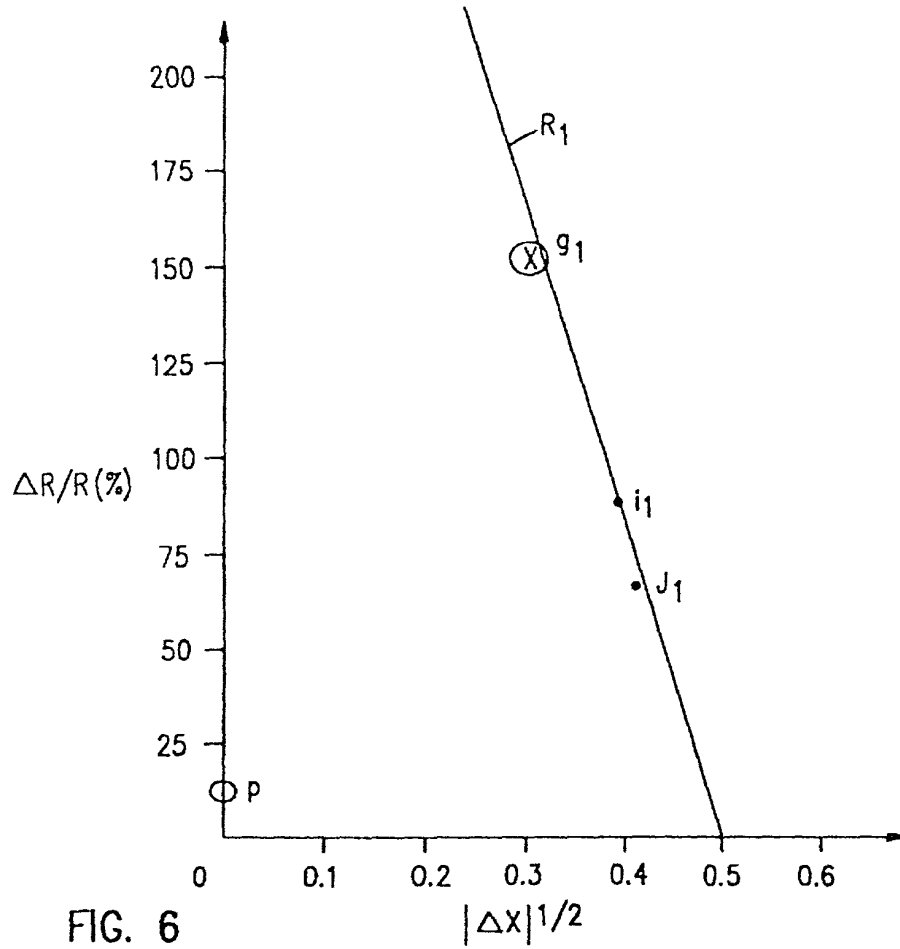


FIG. 6

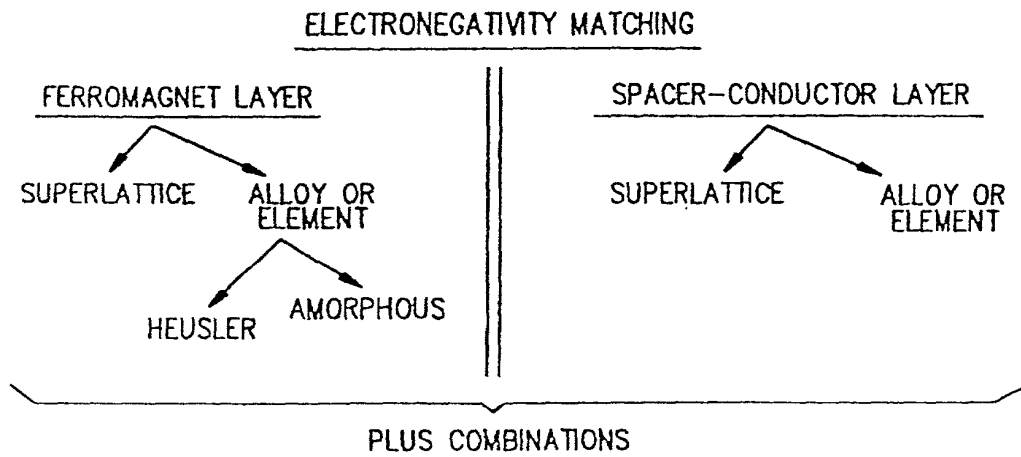
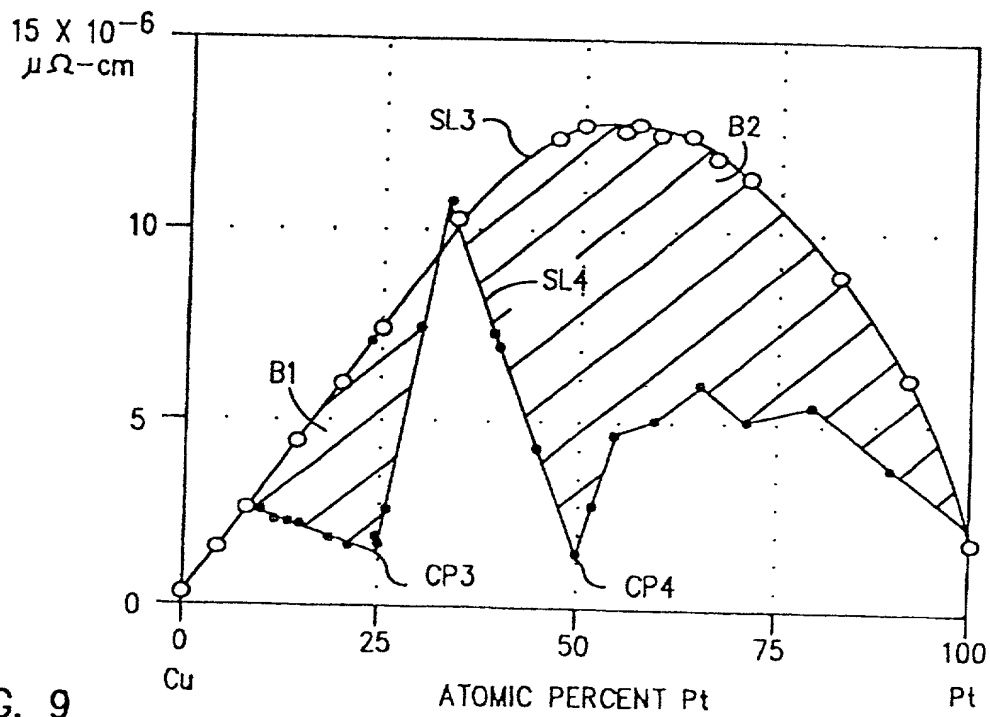
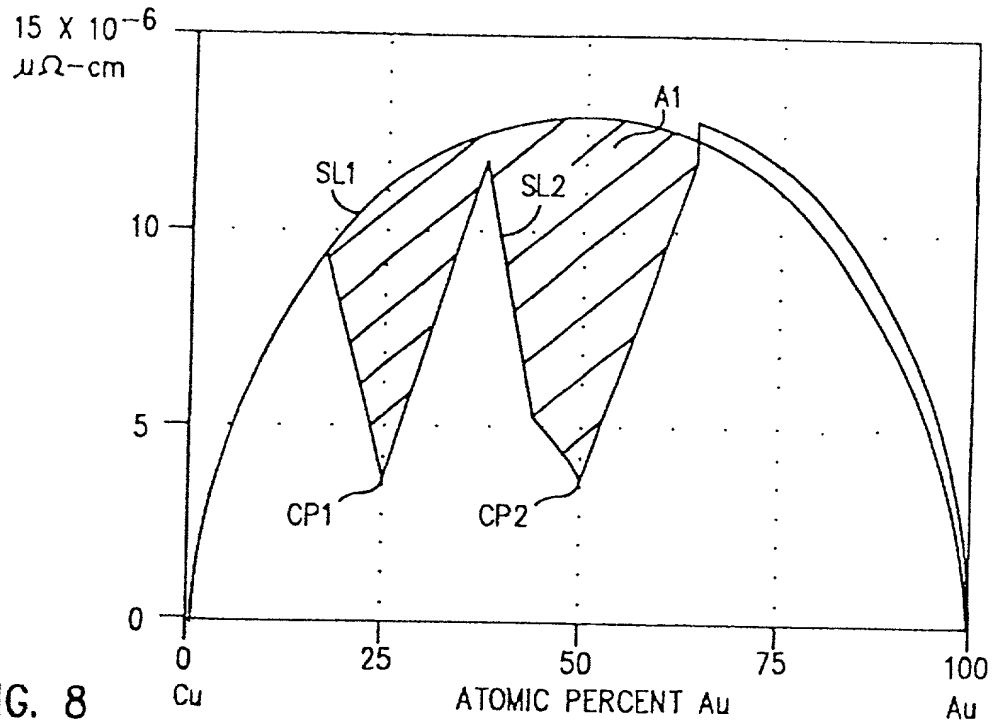


FIG. 7



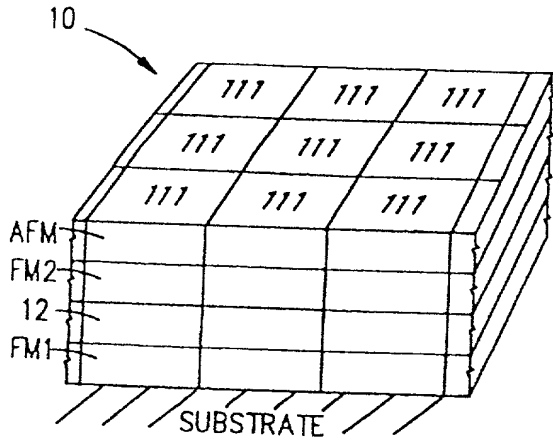


FIG. 11

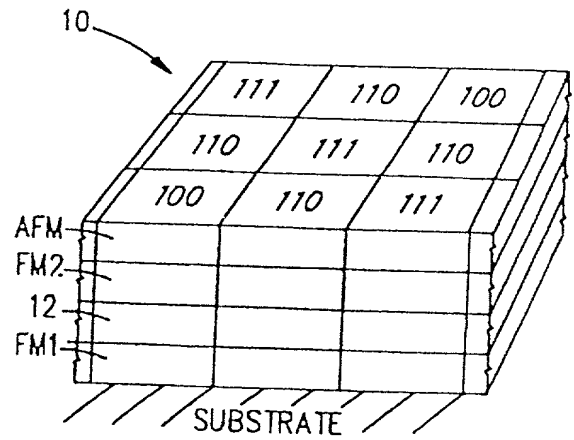


FIG. 10

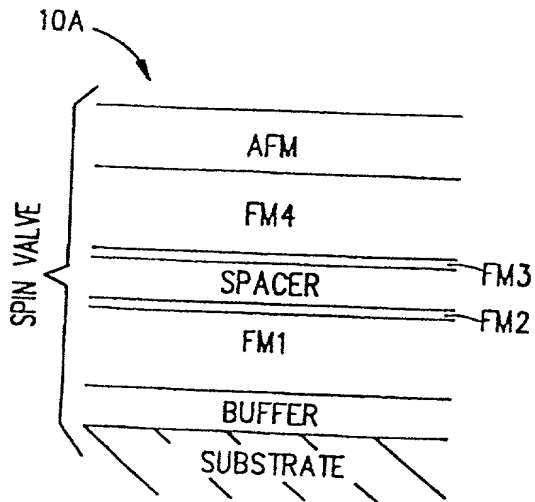


FIG. 12

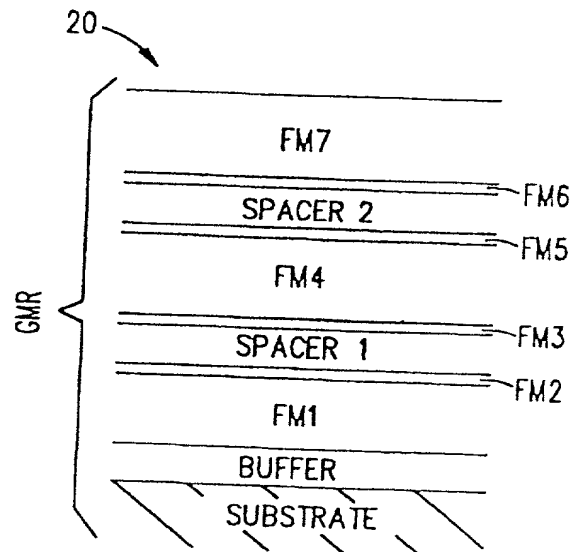


FIG. 13



# DECLARATION FOR PATENT APPLICATION

Docket Number (Optional)  
A26996

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled METHODS AND COMPOSITIONS FOR OPTIMIZING INTERFACIAL PROPERTIES OF MAGNETORESISTIVE SENSORS, the specification of which is attached hereto unless the following box is checked:

☐ was filed on \_\_\_\_\_ as United States Application Number or PCT International Application Number \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

RECEIVED  
AUG 18 1998

Priority Claimed

_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

_____ (Application Number)	_____ (Filing Date)	_____ (Status - patented, pending, abandoned)
_____ (Application Number)	_____ (Filing Date)	_____ (Status - patented, pending, abandoned)

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

\_\_\_\_\_  
Address all telephone calls to Nathan N. Kallman at telephone number (408) 867-1520  
Address all correspondence to Nathan N. Kallman  
20900 Sarahills Drive  
Saratoga, CA 95070

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and th like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor (given name, family name) Daniel A. Nepela  
Inventor's signature *Daniel A. Nepela* Date Aug 22, 1998  
Residence San Jose, California Citizenship U.S.A.  
Post Office Address 1009 Blossom River Way #247  
San Jose, CA 95123

Full name of second joint inventor, if any (given name, family name) \_\_\_\_\_  
Second Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_  
Residence \_\_\_\_\_ Citizenship \_\_\_\_\_  
Post Office Address \_\_\_\_\_

☐ Additional inventors are being named on a separate sheet attached hereto.